

सत्यमेवजयते

प्रत्नकीर्तिमपावृणु

SECTION-1 TABLE — A: TIME AND WORK FRAME

EXECUTION OF WORK

FOR THE WORK UNDER-PROVISION FOR ILLUMINATION AT MADAN MOHAN TEMPLE VRINDAVAN DISTT MATHURA

MANUAL BIDS SHALL NOT BE ACCEPTED.

CRITICAL DATE SHEET

CRITICAL DATE SHEET

| 1. | Date of Issue of Tender | 02.02.2023 |
|----|---|---|
| 2. | Bid Document Download / Sale Start Date | 02.02.2023 |
| 3. | Date of Pre Bid Conference- For clarifying issues and doubts, if any, about specification of material and services projected in Bid document. | 15.02.2023 |
| 5. | Bid Submission End Date | 21.02.2023at 15:00 |
| 6. | Date of opening of Technical bid | 22.02.2023 at15:30 |
| 7. | Date of opening of Financial bid | After approval of technical bid by Technical evaluation Committee |
| 8. | Validity of Bid | 120-days from the date of opening of financial bid |

Autourland og Accessengist all till gerener erderor Archauskgisal Survey of India antigi poster, strift Agra Circle, Agra

PROVISION FOR ILLUMINATION AT MADAN MOHAN TEMPLE VRINDAVAN DISTT MATHURA

The Archaeological Survey of India Agra Circle, Agra invites Online Bids in the prescribed form under the double Bid system i.e. technical and Financial Bid forIlluminationwork**PROVISION FOR ILLUMINATION AT MADAN MOHAN TEMPLE VRINDAVAN DISTT MATHURA**

1. The system of e-tendering shall be adopted as double Bid.Tender documents may be downloaded from CPPP site <u>https://eprocure.gov.in/eprocure/app</u> as per the schedule as given in CRITICAL DATE SHEET.

2. Bid Submission:

Applicants/ intending or interested Bidders are invited to submit their online proposal after carefully reading the Request for Proposal (RFP) by providing necessary document and submission of BOQ. Such proposal are to be submitted online within the stipulated date and time as mentioned in the Tender Document and as given in CRITICAL DATE SHEET.Bids shall be submitted online only at CPPP website: <u>https://eprocure.gov.in/eprocure/app.</u>

Bid documents may be scanned with 100 dpi with black and white option which help in reducing size of the scanned document.

3. Earnest Money Deposit:

The Hard Copy of original instruments in respect of cost of earnest money must be deposited to the SUPERINTENDING ARCHAEOLOGIST, ARCHAEOLOGICAL SURVEY OF INDIA, AGRA CIRCLE, 22 MALL ROAD, AGRA on or before Tender opening date/ time as mentioned in critical date sheet.

The offer without EMD will be rejected summarily. EMD is to be supplied by all the bidders except those who are registered with Central Purchase Organization, National Small Industries Corporation (NSIC)/MSME..

4. <u>Tender cost Of Tender:</u> RS. 93,14,082/- (Rs. NINETY THREE LAKHS FOURTEEN THOUSAND EIGHTY TWO ONLY)

| Contact Person | SUPERINTENDING ARCHAEOLOGIST |
|---------------------------|---|
| Address for communication | SUPERINTENDING ARCHAEOLOGIST, ARCHAEOLOGICAL SURVEY OF INDIA, AGRA CIRCLE, 22 MALL ROAD,AGRA e-mail – circleagra.asi@gov.in |
| Contact No. | 0562- 2227261 |

-: Contact Details:-

्ताधीलय Chilco of the अलीकाम पुरातत्वतिन् Superintending Archaeologist भारतीत्य पुरातत्व सर्वेकाम Archaeological Survey of India अगगरा मण्डल, आगरा Archae Cirola, Arca

PROVISION FOR ILLUMINATION AT MADAN MOHAN TEMPLE VRINDAVAN DISTT MATHURA



FILE NO-03/MTH/64/2022-2023/W **GOVERNMENT OF INDIA** भारतसरकार Office of the Superintending Archaeologist कार्यालय अधीक्षणपुरातत्वविद Archaeological Survey of India भारतीय प्रातत्वसर्वेक्षण Agra Circle, 22 Mall Road, Agra 282001 आगरामण्डल, 22 मालरोड, आगरा282001 NOTICE INVITING TENDER निविदाआमंत्रणसूचना

The Superintending Archaeologist, Archaeological Survey of India, Agra Circle, Agra, invites e-tender on the behalf of the President of India, through CPP Portal for the following works as per specification given below under the work PROVISION FOR ILLUMINATION AT MADAN MOHAN TEMPLE VRINDAVAN DISTT MATHURA from the registered contractors of Archaeological Survey of India or any Central Government Department.

अधीक्षणपुरातत्वविद्, भारतीय पुरातत्वसर्वेक्षणआगरामण्डल, आगराभारत के राष्ट्रपति की ओर से सीo पीo पीoपोर्टल के माध्यम से कार्यPROVISION FOR ILLUMINATION AT MADAN MOHAN TEMPLE VRINDAVAN DISTT MATHURAहेतुभारतीय पुरातत्वसर्वेक्षण या केंद्रसरकारके किसीविभाग के पंजीकृतठेकेदारों से ईटेंडरआमंत्रित करताहै।

Eligibility Criteria: -

पात्रतामापदंडः–

- 1^o The firm/Agency should have registration in ASI /State PWD or any Central Government Department for Civil/Electric works.
- क. फर्म/एजेंसी का सिविल/बिजली कार्यों के लिये भारतीय पुरातत्व सर्वेक्षण/राज्य पी०डबल्यू०डी० या केंद्र सरकार के किसी भी 20 विभाग में पंजीकरण होना चाहिये।
- 3. The firm/Agency should have GST registration.
- ख. फर्म/एजेंसी के पास जी0 एस0 टी0 पंजीकरण होना चाहिये।
- 4. Pan Card.
- ग. पेनकार्ड।
- 5. The Firm/Agency should have income tax return for threefinancial year 2018-2019, 2019-2020 and 2020-2021. (A.Y. 2019-2020, 2020-2021, & 2021-2022).

घ. फर्म/एजेंसी को तीन वित्तीय वर्ष 2018—2019, 2019—2020एवं 2020—2021 (निर्धारण वर्ष 2019—2020, 2020—2021 एवं 2021-2022)का आयकर रिटर्न भरा होना चाहिये।

6. The firm/agency should have average annual financial turnover during three financial year (2018-2019, 2019-2020 and 2020-2021), should be at least 30% of the tender cost i.e. Rs. 27,94,225/-. A certificate in this regard issued by the CA has to be submitted.

च. फर्म /एजेंसी के पास 3 वित्तीय वर्षों(2018–2019, 2019–2020 एवं 2020–2021)के दौरान औसत वार्षिक वित्तीय करोबार निविदा राशि का कम से कम 30 प्रतिशत होना चाहिये यानी रु० 27,94,225/- जिसे सी० ए० द्वारा जारी प्रमाण पत्र के रुप में प्रस्तुत करना होगा।

7. The firm / agency should have experience for completion at least three similar nature of work i.e. Archaeological Illumination/Façade Lightning Or as per BOQ of the said NIT at Monuments/heritage sites/Govt. Buildings of Central/State Government each costing not less than 40% of the tender cost i.e. 37,25,633/- OR Two Similar Nature of works each Costing not less than 50% of the tender cost i.e. Rs. 46,57,041/- OR One Similar Nature of work costing not less than 80% of the tender cost i.e. Rs. 74,51,266/-. And that/those work/works should have been completed during the last seven financial years. i.e. 2015-2016 to 2021-2022.

छ. फर्म /एजेंसी का `समान प्रकृति के तीन कार्य स्मारक/धरोहर स्थल पर निविदा राशि से 40 प्रतिशत से कम नहीं यानी रु0 37,25,633/- या दो समान प्रकृति का काम, निविदा राशि का 50 प्रतिशत से कम नहीं यानी रू0 46,57,04 प्रकृति का काम निविदा राशि का 80 प्रतिशत से कम नहीं यानी रु० 74,51,266/- का होना चाहिये और उने तीन कामी को पिछले ntending Archaeologist सात वित्तीय वर्षों के दौरान पूरा किया जाना चाहिये यानी 2015–2016 से 2021–2022 के मध्य।

- 8. Copy of work order and completion certificate should be uploaded on CPP Portal as per tender required.
- ज. कार्य आदेश और पूर्णता प्रमाण पत्र की प्रतिलिपि आवश्यक निविदा के अनुसार सी० पी० पी० पोर्टल पर अपलोड की जानी चाहिये। The eligible Contractors may upload their tender documents online only at CPPP website:<u>https:// procure.</u>

gov.in/ eprocure /app.upto15:00 hours of 21/02/2023 which will be opened on dated 22/02/2023at 15:30 hours.

पात्र ठेकेदार केवल सी0पी0 पी0वेबसाईट <u>http://eprocure.gov.in/eprocure/app</u> पर अपने निविदा दस्तावेज दिनांक 21/02/2023at 15:00 तक ऑनालाइन अपलोड कर सकते हैं जो दिनांक 22/02/2023at 15:30 खोला जाएगा।

TENDER COSTRS. 93,14,082/- (Rs. NINETY THREE LAKHS FOURTEEN THOUSAND EIGHTY TWO ONLY) अनुमानितराशिः– २० 93,14,082/- (२० तेरांनवे लाख चौदह हजार बेरासी मात्र)

EARNEST MONEY RS. 2,32,852/- (TWO LAKHS THIRTY TWO THOUSAND EIGHT HUNDRED FIFTY TWO ONLY) अमानतराशिः– रु० 2,32,852/- (रु० दो लाख बत्तीस हजार आठ सौ बाबन मात्र)

> (Exemption as per rules) (नियमानुसार छूट)

The earnest money should be in the form of FDR drawn in favour of the "SUPERINTENDING ARCHAEOLOGIST, ARCHAEOLOGICAL SURVEY OF INDIA" Payable at Agra of any scheduled bank guaranteed by the Reserve Bank of India and enclose with the tender.

अमानत राशि एफ0 डी0 आर0 के रुप में निविदा के साथ संलग्न होना चाहिए जो "भारतीय रिजर्व बैंक द्वारा समर्थित आगरा के किसी भी अनुसूचित बैंक में अधीक्षण पुरातत्वविद्, भारतीय पुरातत्व सर्वेक्षण, आगरा मण्डल, आगरा के पक्ष में देय हो।

Time allowed for completion of work will be120 days which will be reckoned after fifteen days from the date of issue of order. Tenders of the contractors who do not deposit earnest money in favour of the SUPERINTENDING ARCHAEOLOGIST, ARCHAEOLOGICAL SURVEY OF INDIA, AGRA CIRCLE in the prescribed form will be liable to be summarily rejected.

कार्य पूरा होने के लिए अनुमत समय 120 दिन होगा जिसे कार्यआदेश जारी होने की तारीख से पंद्रह दिनों के बाद से माना जाएगा। उन ठेकेदारों की निविदाएं निरस्त मानी जाएगी जो अधीक्षण पुरातत्वविद्, भारतीय पुरातत्व सर्वेक्षण, आगरा मण्डल, आगरा के पक्ष में निर्धारित राशि जमा नहीं करते हैं।

Conditions and tender forms can be downloaded from our ASI website <u>www.asiagracircle.in</u>and eportal <u>eprocure.gov.in</u>.**w.e.f. 02.02.2023 to 21/02/2023upto 15:00** hours of each day.

निविदा शर्तें एवं प्रपन्न हमारी वेबसाईट <u>www.asiagracircle.in</u> और e-portal <u>eprocure.gov.in</u>. से दिनांक 02.02.2023 से दिनांक 21/02/2023upto 15:00 बजे तक डाउनलोड किए जा सकते हैं।

No tender shall be entertained after this deadline under any circumstances what so ever. The Bids of tenders will be opened on 22/02/2023AT 15:30 HRS. in the presence of authorized representative of Bidders as may wish to be personally present.

इस समय सीमा के बाद किसी भी परिस्थिति में कोई भी निविदा पर विचार नहीं किया जाएगा। निविदाओं की तकनीकि बोलियां बोली दाताओं के अधिकृत प्रतिनिधि की उपस्थिति में या व्यक्तिगत रुप से उपस्थिति में दिनांक 22/02/2023 को 15:30 बजे खोली जाएगी।

Tender documents are available in the ASI website <u>www.asiagracircle.in</u>and e-portal <u>eprocure.gov.in</u>. The bidder must attach the copy of EMD should be deposited inASI, Agra Circle Agra on or before the date of opening the tender.

भारतीय पुरातत्व सर्वेक्षण, आगरा की वेबसाईट <u>www.asiagracircle.in</u> और e-portal <u>eprocure.gov.in</u>. पर निविदा दस्तावेज उपलब्ध हैं। बोली लगाने वाले को तकनीकि निविदा खोलने से पहले भारतीय पुरातत्व सर्वेक्षण, आगरा मण्डल, आगरा में अमानत राशि की प्रति जमा करनी होगी।

The Approving Authority reserves the right to amend or withdraw any of the terms and conditions contained in the Tender Document or to reject any or all tenders without given any notice or assigning any reason. The decision of the Regional Director (North), in this regard shall be final and binding on all parties in all circumstances.

अनुमोदन प्राधिकारी के पास दस्तावेज में शामिल किसी भी नियम और शर्तों को संशोधित करने या वापस लेने या किसीयसिय नोटिस दिए बिना या कोई कारण बताए किसी भी या सभी निविदाओं को अस्वीकार करने का अधिकार सुरक्षित रखताहै। इस मिन्न क्षेत्रीय निदेशक (उत्तरी) का निर्णय सभी परिस्थितियों में सभी पक्षों पर अंतिम और बाध्यकारी होगा।

NAME OF WORK: PROVISION FOR ILLUMINATION AT MADAN MOHAN TEMPLE VRINDAVAN **DISTT MATHURA**

| SI. No. | Description of Execution of work | Qt | у. |
|---------|---|---------------|-----------------------------------|
| 1. | SITC of high quality long through mono color wash light, Protection Rating : IP66, complying to BIS standard IS 10322 (Part 5/Sec 1): 2012, and having CE certification against standard EN 61547: 2009, EN 60598-1:2015, and EN 61347-2-13:2014 Mounting Structure : Additional wall mount yoke arrangements for fixing the lights. Rotation view : Inbuilt body rotating angle in degrees for uniform rotation angle to get the desired effect. Power consumption : 120-150W, CCT : 2700-3000K, (as per the design approval) Beam Angle Narrow/medium/wide (as per site requirement), Control : ON/OFF, Body : Die casted / extruded aluminum, Hot spot and light distribution : Optics Designed to minimize hot spots. Power Input : DC12/24V with external driver, Surge Protection : Inbuilt surge protection 2KV-4KV(Additional if required will be added as per the requirement) Glare : Specially designed glare free round shape 360 deg / 3 unit. Focusing area/LED will be kept 90 Deg perpendicular below the glare free optic. Size of the LED optic & glare unit must be equal or +/-2% higher to achieve the maximum intensity and less glare. This additional arrangement can be fixed or removed on the application. Glare free optical design for human viewing angle from a distance within 2-3 Mtr. Toughened transparent glass sealed above the glare free unit. Painting : 7 tank processed chemical treatment before the powder coat black/ash/approved color coat. Fixture will be suitable to operate in a temperature range of 0°C to 50°C , lifetime should be at least 50,000 burning hours at L70 at 25 degree centigrade with total protection class of IP 66 & IK07 . Luminaire is inclusive of Integral male/female waterproof connectors , driver, accessories for fixing (nut , bolt , clamps etc) with structures in pre wired conditions as per IS. Light testing standard should be LM79, LED Driver, IP66 or higher, IK05 or higher etc. (Rate Including GST). | 12.00 | EACH |
| 2. | SITC of high quality long throw mono color wash light, Protection Rating : IP65, complying to BIS standard IS 10322 (Part 5/Sec 1): 2012, and having CE certification against standard EN 61547: 2009, EN 60598-1:2015, and EN 61347-2-13:2014 Mounting Structure : Additional wall mount yoke arrangements for fixing the lights. Rotation view : Inbuilt body rotating angle in degrees for uniform rotation angle to get the desired effect. Power consumption : 100-110W, CCT : 2700K-3000K, (as per the design approval) Beam Angle Narrow/medium/wide (as per site requirement), Control : Manual/ON/OFF, Channel : 1 CH, Body : Die casted / extruded aluminum, Hot spot and light distribution : Optics Designed to minimize hot spots & fringing in color mixing applications. Power Input : AC 110-230V, 50Hz or DC12/24V with external driver, Surge Protection : Inbuilt surge protection 2KV-4KV(Additional if required will be added as per the requirement) Glare : Specially designed glare free round shape 360 deg / 3 unit. Focusing area/LED will be kept 90 Deg perpendicular below the glare free optic. Size of the LED optic & glare unit must be equal or +/-2% higher to achieve the maximum intensity and less glare. This additional arrangement can be fixed or removed on the application. Glare free optical design for human viewing angle from a distance within 2-3 Mtr. Toughened transparent glass sealed above the glare free unit. Painting : 7 tank processed chemical treatment before the powder coat black/ash/approved color coat. Fixture will be suitable to operate in a temperature range of 0°C to 50°C , lifetime should be at least 50,000 burning hours at L70 at 25 degree centigrade with total protection class of IP 65 & IK07. Luminaire is inclusive of Integral male/female waterproof connectors , driver, accessories for fixing (nut , bolt , clamps etc) with structures in pre wired conditions as per IS. Light testing standard should be LM79, LED Driver, IP65 or higher, IK05 or higher etc. (Rate Including GST). | 24.00 | EACH |
| • | 4 | STATE PURCHE | <u>विव्</u> |
| | PROVISION FOR ILLUMINATION AT MADAN MOHAN TEMPLE VRINDAVAN DISTT MATH | Upptintandias | eologist सर्वेक्षण of India |

| - | IK07, complying to BIS standard IS 10322 (Part 5/Sec 1): 2012, and having CE certification against standard EN 61547: 2009, EN 60598-1:2015, and EN 61347-2-13:2014 Mounting Structure : Additional wall mount yoke arrangements for fixing the lights. Rotation view : Inbuilt body rotating angle in degrees for uniform rotation angle to get the desired effect. Power consumption : 50-60W, CCT : 2700K-3000K, (as per the design approval) Beam Angle 25°/45°/60°, Control : Manual/ON/OFF, Channel : 1 CH, Body : Die casted / extruded aluminum, Hot spot and light distribution : Optics Designed to minimize hot spots & fringing in color mixing applications. Power Input : AC 110-230V, 50Hz or DC12/24V with external driver, Surge Protection : Inbuilt surge protection 2KV-4KV(Additional if required will be added as per the requirement) Glare : Specially designed glare free round shape 360 deg / 3 unit. Focusing area/LED will be kept 90 Deg perpendicular below the glare free optic. Size of the LED optic & glare unit must be equal or +/-2% higher to achieve the maximum intensity and less glare. This additional arrangement can be fixed or removed on the application. Glare free optical design for human viewing angle from a distance within 2-3 Mtr. Toughened transparent glass sealed above the glare free unit. Painting : 7 tank processed chemical treatment before the powder coat black/ash/approved color coat. Fixture will be suitable to operate in a temperature range of 0°C to 50°C , lifetime should be at least 50,000 burning hours at L70 at 25 degree centigrade with total protection class of IP 65 & IK07 . Luminaire is inclusive of Integral male/female waterproof connectors , driver, accessories for fixing (nut , bolt , clamps etc) with structures in pre wired conditions as per IS. Light testing standard should be LM79, LED Driver, IP65 or higher, IK05 or higher, tec (Pate Including CST). | | |
|----|--|--------|------|
| 4. | higher etc. (Rate Including GST). SITC of high quality long throw mono color linear wash light, Protection Rating : IP65, complying to BIS standard IS 10322 (Part 5/Sec 1): 2012, and having CE certification against standard EN 61547: 2009, EN 60598-1:2015, and EN 61347-2-13:2014 Mounting Structure : Additional wall mount yoke arrangements for fixing the lights. Rotation view : Inbuilt body rotating angle in degrees for uniform rotation angle to get the desired effect. Power consumption : 40-60W, CCT : 2700-3000K, (as per the design approval) Beam Angle Narrow/medium/wide (as per site requirement), Control : Manual/ON/OFF, Channel : 1 CH, Body : Die casted / extruded aluminum, Hot spot and light distribution : Optics Designed to minimize hot spots & fringing in color mixing applications. Power Input : AC 110-230V, 50Hz or DC12/24V with external driver, Surge Protection : Inbuilt surge protection 2KV-4KV(Additional if required will be added as per the requirement) Glare : Specially designed glare free round shape 360 deg / 3 unit. Focusing area/LED will be kept 90 Deg perpendicular below the glare free optic. Size of the LED optic & glare unit must be equal or +/-2% higher to achieve the maximum intensity and less glare. This additional arrangement can be fixed or removed on the application. Glare free optical design for human viewing angle from a distance within 2- 3 Mtr. Toughened transparent glass sealed above the glare free unit. Painting : 7 tank processed chemical treatment before the powder coat black/ash/approved color coat. Fixture will be suitable to operate in a temperature range of 0°C to 50°C , lifetime should be at least 50,000 burning hours at L70 at 25 degree centigrade with total protection class of IP 65 & IK07. Luminaire is inclusive of Integral male/female waterproof connectors , driver, accessories for fixing (nut , bolt , clamps etc) with structures in pre wired conditions as per IS. Light testing standard should be LM79, LED Driver, IP65 or higher, IK05 or higher e | 28.00 | EACH |
| 5. | SITC of Neon Flex, 15-20W/M, 3000K, IP66 & IK07, DC24V. Neon Flex, Silicon material-Much more flexible, Efficient heat dissipation, Smooth plane lighting surface ,Perfect resealing with silicone glue. Resistant UV, Flame, Salt, Chlorine. Top Bending (Diameter 180mm). with suitable aluminum fixing clips/channels for mounting. (Rate Including GST). | 130.00 | RMT |
| | SITC of Outdoor featured customized step light with housing of Pre cast Concrete Cement Body or Terracotta Sandblast / Grey Finish Coating and Luminaire Wattage 5- 8W, Well designed thermal management system with aluminium heat sink Operating PROVISION FOR ILLUMINATION AT MADAN MOHAN TEMPLE VRINDAVAN DISTT MATH [6] | 40.00 | EACH |

| | Voltage of AC 165.270V 50HZ with universal electronic driver highly the termination | | 1 |
|------------|--|---------|------|
| | Voltage of AC 165-270V 50HZ with universal electronic driver, Light colour should be iny range of 2700-4000K, Mean rated service life L70(tq 25 °C) = 50,000 h.Ingress | | |
| | protection rating (DIN EN 60529): IP65,The luminaire should be provided with | | |
| | Electrical safety class I. Operating Temperature 0 deg to +50 deg , minimum hight | | |
| | shuld be approximate 300 mm. (Rate Including GST). | | |
| | SITC of DC power driver for the above Lights, Power : 200W, Input : AC 110-240V AC, | | |
| | 50Hz, Output : DC 12/24V, Protection rating, IP65, Surge protection : LL 4KV, LE | 57.00 | EACH |
| | 6KV). (Rate Including GST). | | |
| 8. | Supply of PVC insulated multi core electrical armored flexible 4C x 16Sq mm power | | |
| | cable having less electrical losses. This PVC insulated and round sheathed wire | 1200.00 | DAAT |
| | features a bright multi strands aluminum conductors and it supports voltage grade up | 1200.00 | RMT |
| 9. | to 1100V. (As per actual depending upon the site condition). (Rate Including GST). | | |
| 5. | Laying and installation of PVC insulated multi core electrical armored flexible 4C x | | |
| | 16Sq mm power cable having less electrical losses. (As per actual depending upon the site condition). (Rate Including GST). | 1200.00 | RMT |
| 10. | Supply of PVC insulated multi core electrical un armored flexible 4C x 2.5Sq mm power | | |
| | cable having less electrical losses. This PVC insulated and round sheathed wire | | |
| | features a bright multi strands copper conductors and it supports voltage grade up to | 1200.00 | RMT |
| | 1100V. (As per actual depending upon the site condition) | | |
| 11. | Laying and installation of PVC insulated multi core electrical un armored flexible 4C x | | |
| | 2.5Sq mm power cable having less electrical losses. (As per actual depending upon | 1200.00 | RMT |
| | the site condition). (Rate Including GST). | | |
| 12. | SITC of MS poles for fixing the high power LED façade wash/spot lights with the height | | |
| | 9- 12 Meter as per design/Site condition along with necessary clamping arrangements. | | |
| | (Note - dia 76mmx 3.2mm A class, base plate is welded to pole dia 140mm x 4.5mm B | | |
| | class with 4 nos. mounting holes. Integral connector block for loop out is flushed in | 6.00 | EACH |
| | bottom section of the pole. The contractor shall submit the design of the pole and | | |
| | colour provided by the manufacturer to Engineer in charge for approval and design may very as per the site condition.) (Rate Including GST). | | |
| 13. | Supply and installation of stone fitment with special adhesive for luminare installation. (| | |
| | Use 40 mm thick red sand stone 4.50 sqft in 1 no.). (Rate Including GST). | 30.00 | EACH |
| 14. | SITC of IP65 "T" power connectors easy and extremely precise locking system. High | | |
| | impact materials - long- lasting and reliable. (Rate Including GST). | 40.00 | EACH |
| 15. | SITC of IP65 "I" power connectors easy and extremely precise locking system. High | 20.00 | FACU |
| 1. | improved metaviale land land and like the transmission of the | 38.00 | EACH |
| | impact materials - long- lasting and reliable. (Rate Including GST). | 38.00 | |
| | SITC of earthen with galvanized iron earth plate, Eathing pipe, GI earthling wire, | | |
| | SITC of earthen with galvanized iron earth plate, Eathing pipe, GI earthling wire, complete with all materials, testing and recording the result as per specification no EA- | 2.00 | EACH |
| 16. | SITC of earthen with galvanized iron earth plate, Eathing pipe, GI earthling wire, complete with all materials, testing and recording the result as per specification no EA-EP(9-1-1)(2018-2019). (Rate Including GST). | 2.00 | EACH |
| 16. 17. | SITC of earthen with galvanized iron earth plate, Eathing pipe, GI earthling wire, complete with all materials, testing and recording the result as per specification no EA- EP(9- 1-1)(2018-2019). (Rate Including GST). SITC of customized waterproof power junction box/power cable terminal box, IP65 | 2.00 | EACH |
| 16. | SITC of earthen with galvanized iron earth plate, Eathing pipe, GI earthling wire, complete with all materials, testing and recording the result as per specification no EA- EP(9- 1-1)(2018-2019). (Rate Including GST). SITC of customized waterproof power junction box/power cable terminal box, IP65 made up of rugged, non- corrosive, high impact polycarbonate, molded nylon encases | | |
| 16. | SITC of earthen with galvanized iron earth plate, Eathing pipe, GI earthling wire, complete with all materials, testing and recording the result as per specification no EA- EP(9-1-1)(2018-2019). (Rate Including GST). SITC of customized waterproof power junction box/power cable terminal box, IP65 made up of rugged, non- corrosive, high impact polycarbonate, molded nylon encases connectors that use screw compression to secure the wires, protection against water | 2.00 | |
| 16. | SITC of earthen with galvanized iron earth plate, Eathing pipe, GI earthling wire, complete with all materials, testing and recording the result as per specification no EA- EP(9- 1-1)(2018-2019). (Rate Including GST). SITC of customized waterproof power junction box/power cable terminal box, IP65 made up of rugged, non- corrosive, high impact polycarbonate, molded nylon encases connectors that use screw compression to secure the wires, protection against water jets and dust from all directions, with bus bar and MCB 10A. (Rate Including GST). | | |
| 16. | SITC of earthen with galvanized iron earth plate, Eathing pipe, GI earthling wire, complete with all materials, testing and recording the result as per specification no EA- EP(9-1-1)(2018-2019). (Rate Including GST). SITC of customized waterproof power junction box/power cable terminal box, IP65 made up of rugged, non- corrosive, high impact polycarbonate, molded nylon encases connectors that use screw compression to secure the wires, protection against water jets and dust from all directions, with bus bar and MCB 10A. (Rate Including GST). SITC of Power Distribution Electrical panel having a Incomer of 32A. Floor mount / rack | | |
| 16. | SITC of earthen with galvanized iron earth plate, Eathing pipe, GI earthling wire, complete with all materials, testing and recording the result as per specification no EA- EP(9-1-1)(2018-2019). (Rate Including GST). SITC of customized waterproof power junction box/power cable terminal box, IP65 made up of rugged, non- corrosive, high impact polycarbonate, molded nylon encases connectors that use screw compression to secure the wires, protection against water jets and dust from all directions, with bus bar and MCB 10A. (Rate Including GST). SITC of Power Distribution Electrical panel having a Incomer of 32A. Floor mount / rack mount / wall mount. Miniature circuit breakers of single poles shall be fixed of different | | |
| 16. | SITC of earthen with galvanized iron earth plate, Eathing pipe, GI earthling wire, complete with all materials, testing and recording the result as per specification no EA- EP(9-1-1)(2018-2019). (Rate Including GST) . SITC of customized waterproof power junction box/power cable terminal box, IP65 made up of rugged, non- corrosive, high impact polycarbonate, molded nylon encases connectors that use screw compression to secure the wires, protection against water jets and dust from all directions, with bus bar and MCB 10A. (Rate Including GST) . SITC of Power Distribution Electrical panel having a Incomer of 32A. Floor mount / rack mount / wall mount. Miniature circuit breakers of single poles shall be fixed of different ratings from 6/10/16/25A as per the lighting fixtures. Wiring inside the module for | | |
| 7. | SITC of earthen with galvanized iron earth plate, Eathing pipe, GI earthling wire, complete with all materials, testing and recording the result as per specification no EA- EP(9-1-1)(2018-2019). (Rate Including GST). SITC of customized waterproof power junction box/power cable terminal box, IP65 made up of rugged, non- corrosive, high impact polycarbonate, molded nylon encases connectors that use screw compression to secure the wires, protection against water jets and dust from all directions, with bus bar and MCB 10A. (Rate Including GST). SITC of Power Distribution Electrical panel having a Incomer of 32A. Floor mount / rack mount / wall mount. Miniature circuit breakers of single poles shall be fixed of different ratings from 6/10/16/25A as per the lighting fixtures. Wiring inside the module for power, control protection and instrument etc. shall be done with use of 1100 V | 3.00 | EACH |
| 16. | SITC of earthen with galvanized iron earth plate, Eathing pipe, GI earthling wire, complete with all materials, testing and recording the result as per specification no EA- EP(9-1-1)(2018-2019). (Rate Including GST). SITC of customized waterproof power junction box/power cable terminal box, IP65 made up of rugged, non- corrosive, high impact polycarbonate, molded nylon encases connectors that use screw compression to secure the wires, protection against water jets and dust from all directions, with bus bar and MCB 10A. (Rate Including GST). SITC of Power Distribution Electrical panel having a Incomer of 32A. Floor mount / rack mount / wall mount. Miniature circuit breakers of single poles shall be fixed of different ratings from 6/10/16/25A as per the lighting fixtures. Wiring inside the module for power, control protection and instrument etc. shall be done with use of 1100 V confirming to IS 694 and IS 8130 All welding slag grounded off and welding pits wiped | | EACH |
| 16. | SITC of earthen with galvanized iron earth plate, Eathing pipe, GI earthling wire, complete with all materials, testing and recording the result as per specification no EA-EP(9-1-1)(2018-2019). (Rate Including GST). SITC of customized waterproof power junction box/power cable terminal box, IP65 made up of rugged, non- corrosive, high impact polycarbonate, molded nylon encases connectors that use screw compression to secure the wires, protection against water jets and dust from all directions, with bus bar and MCB 10A. (Rate Including GST). SITC of Power Distribution Electrical panel having a Incomer of 32A. Floor mount / rack mount / wall mount. Miniature circuit breakers of single poles shall be fixed of different ratings from 6/10/16/25A as per the lighting fixtures. Wiring inside the module for power, control protection and instrument etc. shall be done with use of 1100 V confirming to IS 694 and IS 8130 All welding slag grounded off and welding pits wiped smooth with plumber metal. Power panels shall be designed in such a way that the internal space is sufficient for hot air movement, and the electrical component does not | 3.00 | EACH |
| 16. | SITC of earthen with galvanized iron earth plate, Eathing pipe, GI earthling wire, complete with all materials, testing and recording the result as per specification no EA-EP(9-1-1)(2018-2019). (Rate Including GST). SITC of customized waterproof power junction box/power cable terminal box, IP65 made up of rugged, non- corrosive, high impact polycarbonate, molded nylon encases connectors that use screw compression to secure the wires, protection against water jets and dust from all directions, with bus bar and MCB 10A. (Rate Including GST). SITC of Power Distribution Electrical panel having a Incomer of 32A. Floor mount / rack mount / wall mount. Miniature circuit breakers of single poles shall be fixed of different ratings from 6/10/16/25A as per the lighting fixtures. Wiring inside the module for power, control protection and instrument etc. shall be done with use of 1100 V confirming to IS 694 and IS 8130 All welding slag grounded off and welding pits wiped smooth with plumber metal. Power panels shall be designed in such a way that the internal space is sufficient for hot air movement, and the electrical component does not attain temperature more than 40 degree Celsius. Fabricated panel shall be supported | 3.00 | EACH |
| 16. | SITC of earthen with galvanized iron earth plate, Eathing pipe, GI earthling wire, complete with all materials, testing and recording the result as per specification no EA- EP(9-1-1)(2018-2019). (Rate Including GST). SITC of customized waterproof power junction box/power cable terminal box, IP65 made up of rugged, non- corrosive, high impact polycarbonate, molded nylon encases connectors that use screw compression to secure the wires, protection against water jets and dust from all directions, with bus bar and MCB 10A. (Rate Including GST). SITC of Power Distribution Electrical panel having a Incomer of 32A. Floor mount / rack mount / wall mount. Miniature circuit breakers of single poles shall be fixed of different ratings from 6/10/16/25A as per the lighting fixtures. Wiring inside the module for power, control protection and instrument etc. shall be done with use of 1100 V confirming to IS 694 and IS 8130 All welding slag grounded off and welding pits wiped smooth with plumber metal. Power panels shall be designed in such a way that the internal space is sufficient for hot air movement, and the electrical component does not attain temperature more than 40 degree Celsius. Fabricated panel shall be supported with ms angles of size 25mm x 25mm with an 1.8mm thickness sheet to hold the | 3.00 | EACH |
| 16. | SITC of earthen with galvanized iron earth plate, Eathing pipe, GI earthling wire, complete with all materials, testing and recording the result as per specification no EA-EP(9-1-1)(2018-2019). (Rate Including GST). SITC of customized waterproof power junction box/power cable terminal box, IP65 made up of rugged, non- corrosive, high impact polycarbonate, molded nylon encases connectors that use screw compression to secure the wires, protection against water jets and dust from all directions, with bus bar and MCB 10A. (Rate Including GST). SITC of Power Distribution Electrical panel having a Incomer of 32A. Floor mount / rack mount / wall mount. Miniature circuit breakers of single poles shall be fixed of different ratings from 6/10/16/25A as per the lighting fixtures. Wiring inside the module for power, control protection and instrument etc. shall be done with use of 1100 V confirming to IS 694 and IS 8130 All welding slag grounded off and welding pits wiped smooth with plumber metal. Power panels shall be designed in such a way that the internal space is sufficient for hot air movement, and the electrical component does not attain temperature more than 40 degree Celsius. Fabricated panel shall be supported with ms angles of size 25mm x 25mm with an 1.8mm thickness sheet to hold the structure. Individual MCB control for 12 outgoing circuits. (Rate Including GST). | 3.00 | EACH |
| 7. | SITC of earthen with galvanized iron earth plate, Eathing pipe, GI earthling wire, complete with all materials, testing and recording the result as per specification no EA- EP(9-1-1)(2018-2019). (Rate Including GST). SITC of customized waterproof power junction box/power cable terminal box, IP65 made up of rugged, non- corrosive, high impact polycarbonate, molded nylon encases connectors that use screw compression to secure the wires, protection against water jets and dust from all directions, with bus bar and MCB 10A. (Rate Including GST). SITC of Power Distribution Electrical panel having a Incomer of 32A. Floor mount / rack mount / wall mount. Miniature circuit breakers of single poles shall be fixed of different ratings from 6/10/16/25A as per the lighting fixtures. Wiring inside the module for power, control protection and instrument etc. shall be done with use of 1100 V confirming to IS 694 and IS 8130 All welding slag grounded off and welding pits wiped smooth with plumber metal. Power panels shall be designed in such a way that the internal space is sufficient for hot air movement, and the electrical component does not attain temperature more than 40 degree Celsius. Fabricated panel shall be supported with ms angles of size 25mm x 25mm with an 1.8mm thickness sheet to hold the | 3.00 | EACH |

| | Ivory connectors for the internal terminations and external outgoing connecting points, Fiber / brass glands of suitable size fitted MCB control for outgoing circuits. Custom built as per specification and project requirement. (Rate Including GST). | | |
|-----|---|---------|--------|
| 20. | Supplying and laying 50 mm outside dia. double wall corrugated pipes (DWC) of HDPE for enclosing cable below ground/road surface, to required depth complete for both power and Dmx. (As per actual depending upon the site condition). (Rate Including GST). | 1200.00 | RMT |
| 21. | Supply, laying clamping and installation. 25mm PVC / FRPP Conduits.(As per actuals depending upon the site condition). (Rate Including GST). | 1200.00 | RMT |
| 22. | Supplying and erecting iron, sheet metal work consisting of CRCA sheets, various sections of iron, plates, chequered plates, rods, bars, MS pipes, bending, cutting, drilling and welding complete erected at the position with necessary materials duly painted with one coat of red oxide and two coats of enamel paint to match the switchgears or as per directions by the authority.(6-1- 19)(2018-19). (Rate Including GST). | 200.00 | KG |
| 23. | Providing and laying in position cement concrete of grade 1:3:6 (1 Cement : 3 coarse sand (zone-III) derived from natural sources : 6 graded stone aggregate 20 mm nominal size derived from natural sources) excluding the cost of centering and shuttering - All work up to plinth level [M3]. (Rate Including GST). | 51.36 | Cum |
| 4. | SITC of metallic Protective cage (Jali) for Protection for lights. (Use 1 cage approximate 10.40 sqft.). (Rate Including GST). | 50.00 | bundle |
| 5. | Excavation work by manual means in foundation trenches (not exceeding 1.5m in width or 10 sqm on plan), including dressing of sides and ramming of bottoms, lift up to 1.5 m, including getting out the excavated soil and disposal of surplus excavated soils as directed, within a lead of 50 m. (Rate Including GST). | 111.66 | Cum |
| 6. | SITC of MS Fabricated IP 65 driver Box having IP67 glands for incoming and outgoing power connections as per the project requirement. Wall mounting arrangements with the clamps. Easy of driver mounting, termination having fixing arrangements and door with rubber gasket & locking system (Lot). (Rate Including GST). | 20.00 | bundle |
| 7. | Comprehensive Operation and Maintenance works charges from Item No. 1 to 26) for 5 years (Operation & Maintenance and defect liability Charges for 1st year from the date of testing and commissioning of the project@0%, Operation & Maintenance and defect liability Charges for 2nd year from the date of expiring the first year warranty period, after testing and commissioning of the project@1%, Operation & Maintenance and defect liability Charges for 3rd & 4rth year from the date expiring the second & thiird year warranty period@1.5%, Operation & Maintenance and defect liability Charges for 5th year from the date expiring the fourth year warranty period@2%).(Rate Including GST). | 1.00 | EACH |

Evaluation Criteria

- 1- All documents to be uploaded in CPPP portal properly.
- 2- This is not an item wise bid. The L1 will be selected depending upon the overall lowest bid of all the items.
- 3- The bidders are requested to visit the site and examine the requirement and its rate accordingly before quoting the rate in Online BOQ. If the Quoted rate is obvious Vague (Extremely High or Extremely Low) the Same will not be considered and will be rejected at Financial Stage.

Jes Superintending Archaeologist 5Y.S.A.E.

कार्यालय Office of the

TERMS AND CONDITION FOR SUBMISSION OF TENDER

1. Tenders are hereby invited on behalf of the President of India.for the work under Tender cost of RS. 93,14,082/- (Rs. NINETY THREE LAKHS FOURTEEN THOUSAND EIGHTY TWO ONLY)

2. Tender document consisting of the detailed plans, complete specifications, the schedule of quantities of the various items of work to be done, and the set of conditions of contract to be complied with by the person whose tenders may be accepted. The tender forms can be downloaded from our website- WWW.asiagracircle.inand eportal eprocure.gov.infrom 02.02.2023 to 21/02/2023.

2 (a) The site of the work is available, or the site for the work shall be made available by the department.

1. The Contractors should upload their tender documents online only at CPPP website: https://eprocure.gov.in/eprocure/app.upto 15:00 hours of 21/02/2023 which will be opened on dated 22/02/2023 at 15:30 hours.

2. The time allowed for the work will be 120 days which will be reckoned after fifteen days from the date of issue of order to commence work.

3. The contractors should quote in figures as well as in words the rate and amount tendered by them. The amount for each item should be worked out and the requisite

4. When the contractors signs a tender in an Indian Language the percentage above or below and the tendered amount in case of CPWD form No.7 and the total amount tender in the case of CPWD form No.7 and total amount tendered in the case of CPWD form No.8 and should also be written in the same language. In a case of illiterate contractors the rates or the amounts tendered should by attested by a witness. 5. Issue of tender form will be stopped one days before the date fixed for opening of tender.

6. Earnest money amounting of RS. 2,32,852/- (TWO LAKHS THIRTY TWO THOUSAND EIGHT HUNDRED FIFTY TWO ONLY) (unless exempted) in deposit at call received/FDR of scheduled bank guaranteed by the Reserve Bank of India must accompany each tender

7. The contractor whose tender is accepted (unless exempted) will be required to furnish by way of security deposit for the due fulfillment of his contract.

In the case of works costing up to Rs. 1,00,000/- to 10% of the tender cost of work put to tender. 1)

II) In the case of works costing more than Rs.1,00,000/- and upto 2,00,000/- to 10% on the first Rs.1,00,000/- and 7 % on the balance.

III) In the case of works costing more than Rs.2,00,000/-, 10% on the first Rs.1,00,000/-, 7 % on the next Rs. 1,00,000/- and 5% on the balance amount.

8. The security amount will be deposited by contractor in the form of FDR/CDR of any Bank RBI pledged to the Superintending Archaeologist, Archaeological Survey of India, Agra Circle, Agra. Earnest money deposited at the time of tender, will be treated as a part of the security deposit. The security amount will also be accepted in the shape of Government securities. Fixed deposit receipt of schedule banks will be accepted for this purpose provided confirmatory advise is forthcoming from the Reserve Bank of India. Validity of bid should be minimum of 12 months.

9. The right of acceptance of a tender will be with SUPERINTENDING ARCHAEOLOGIST, ARCHAEOLOGICAL SURVEY OF INDIA,

AGRA CIRCLE, AGRA who does not bind himself to accept the lowest tender and reserves to himself the authority to reject any or all of the tenders received without assignment of a reason. All tenders in which any of the prescribed conditions are not fulfilled or are incomplete in any respect are liable to be rejected. 10. Canvassing in connection with tenders is strictly prohibited and the tenders submitted by the contractors who resort to Canvassing will be liable to rejection.

11. All rates shall be quoted on the proper form of the tender alone.

12. The criteria for approval of the lowest tender is over all lowest one against the total cost of the tender amount of all tenders

13. On acceptance of the tender, the name of the accredited representative(s) of the contractor who would be responsible for taking instructions from the Engineer in charge shall be communicated to the Engineer in charge.

14-Special care should be taken to write the rates in figures as well as in words and the amounts in figures only, in such a way that interposition is not possible. The total amount should be written both in figures and words. The case of figures, the word Rs. should be written before rupees and word (P) after the decimal figures e.g. 2.15 p and case of words the word (Rupees) should proceed and the word 'only' it should in variably upto decimal places. While quoting the area in the schedule of quantities the word only should be written closely following the amount and it should not be written closely following the amount and it should not be written in the next line. 15. The President of India does not bind himself to accept the lowest or any tender and reserves to himself the right of accepting the whole or any part of the tender and

tenderer shall be bound to perform the same at the rates quoted. 16. GST or any other or material in respect of this contracts shall be payable by the contractor and Government will not entertain any claim whatsoever in this respect.

17. The Contractor shall not be permitted to tender for works in the ASI circle (responsible for award and supply of the contracts) in which his near relative is posted as an officer in any capacity between the grades of Superintending Engineer and Assistant (both inclusive). He shall also intimate the names of persons who are working with him in capacity or are subsequently employed by him and who are near relatives to any Gazetted officer in ASI or in the Ministry of Tourism and Culture by the contractor should render him liable to be removed from the approved list of contractors of this Department.

18. The tender of works shall remain valid for a period of **120days** from the date of opening of tenders. If any tender withdraws his tender before the said period or make any modifications in the terms and conditions of the tender, which are not acceptable to the department. Then the Government shall forfeit 100% of the said earnest

19. Contractors exempted from payment of Earnest money and Security Deposit in individual cases should attach with the tender an attested Copy of Competent authorities letter exempting them from the payment of Earnest Money and Security Deposit and should produce the original whenever called upon to do so.

20. The tender for the work shall not be witnessed by a contractor or contractors who himself/themselves has /have tendered or who may and has /have rendered for the same work. Failure to observe this condition would render of the contractors tendering as well as witnessing the tender liable to summary rejection. 21. The copy of uploaded document should be submitted to this office along with the EMD and tenders fee before opening of tender.

Should this tender be accepted, I/we hereby agree abide by and fulfil all the terms and provisions of the said conditions annexed hereto so far as applicable and or in detail thereof to forfeit and pay to the President of India or his successor in office the sum of money mentioned in the said conditions. A sum of Rs._______ (Rupees_______ is herewith forwarded in F.D.R. vide No.______

earnest money and a sum of Rs... dated (Rs as .) in the form of DD. If I /we fails to commence the work as specified in the above memorandum or is I/we fail to deposit the amount of security deposit specified against (ii) a in the above memorandum in accordance with the clause I of the said conditions of contract. I/we agree that the said President of India or his successor in office shall/without prejudice to any other right or remedy, shall be retained by him towards such security deposit. I/we further agree that the said President of India or his successor in office shall also be at liberty to cancel the acceptance of the tender if I / we fail to deposit security amount as

SIGNATURE AND ADDRESS OF CONTRACTOR:

कार्यालय

Office of the

Archaeological Survey of India आगरा मण्डल, आगश Agra Circle, Agra

| PAN No | : Mob. No. : |
|--------|--------------|
| 1- | |

2

The above tender is hereby accepted by me on behalf of the President of India Dated 2022

Signature of the officer by whom THE TENDER IS ACCEPTED

PROVISION FOR ILLUMINATION AT MADAN MOHAN TEMPLE VRINDAVAN DISTT MATHURA Superintending Archaeologist

SCOPE OF WORK AND GENERAL INSTRUCTIONS FOR TENDERERS

The scope of work include architectural illumination of Govind Dev Temple at Vrindavan, as 1. per the attached concept plan and drawing and technical data sheet.

a. Contractor should visit the working site prior to rate tendering.

b. The work to be executed and deduction of voids will be as per CPWD specifications, IS coder and as per Archaeological Survey of India, specification.

c. Water arrangement/scaffolding/T&P articles will be managed by the contractor.

d. The quantity/item of work can be increased/ decreased as per site requirements.

e. The materials pertaining to this work should be checked by the competent officer.

f. All the mounting & commissioning accessories must be considered in the bid.

g. The mounting arrangements should be very strong and to protect the fixtures from the Monkeys/ vandalism/ theft. Proper metal cages to be provided, to the satisfaction of the engineerin-charge.

h. Under the 5 years of comprehensive O&M, contractor must appoint a local technician to take care of Daily operations & maintenance of the lighting.

2. The Archaeological Survey of India reserves the right to amend or withdraw any of the terms and conditions contained in the tender documents or to reject any or all tenders without giving any notice or assigning any reason. The decision of the RD-North, Archaeological Survey of India, in this regard shall be final and binding on all parties in all circumstances.

3. Conditional bids shall not be considered and will be out rightly rejected in very first instance.

4. Contractor will be responsible for timely payment to the Supplier/labour and statutory authorities and compliance of all statutory provisions relating to minimum wages/specified contract amount etc. in respect of the person deployed by him for the work.

5. The contractor shall also be liable for depositing all tax, levies, cess etc. on amount of work done/supply of materials/service rendered by him to the ASI to the concerned tax collection authorities from time to time as per extant rules and regulations on the matter.

6. Whenever the rates quoted by the contractor in figures and in words tally but the amount is not worked out correctly, the rate quoted by the contractor will be taken as correct and not the amount.

7. The total cost quoted by the bidders shall be worked out for deciding the lowest bidder for acceptance of tender.

8. The rate quoted should include all taxes etc. ASI will not entertain any claim whatsoever in this regard.

9. In case contractor's signature on tender is fixed in an Indian Language, the rate/amount/percentage above or below should also be written the same language. In the case of illiterate contractors the rates/percentage should be attested by a witness.

10. The discretion of acceptance of tender, will rest with the Circle/Branch Officer/ Regional Director/RD-North, A.S.I. who does not bind himself to accept the lowest tender and reserve to himself the authority to reject any or all of the tenders received without the assigning any reasons,. Any tender, in which any of the prescribed conditions are not fulfilled or are incomplete in any respect, is liable to be rejected.

11 The contractor shall not be permitted to tender for work in the Archaeological Survey of India, Circle/Branch Office (Responsible for award and execution of contracts) in which this near relative is posted as an officer in any capacity.

12. No Engineer of Gazetted rank or other Gazetted Officer employed in Engineering or Administrative duties in an Engineering Department of the Government of India is allowed to work as a contractor for a period of two years of his retirement from Government service, without the prior permission of the Government of India as aforesaid before submission of the tender or engagement in the contractor's service.

13. The tender of the work shall not be witnessed by a contractor or contractors who himself/themselves/has/have tendered or who may tender for the same work.

14. The successful bidder has to ensure all the necessary applicable obligations such as labour law, EPF, ESI and other statutory provisions. Office of the अधीक्षण पुरातत्वविद्

PROVISION FOR ILLUMINATION AT MADAN MOHAN TEMPLE VRINDAVAN DISTT MATHURATCHIC पुरातत्व रावेकण Superintending Archaeologist



FILE NO-03/MTH/64/2022-2023/W **GOVERNMENT OF INDIA** OFFICE OF SUPERINTENDING ARCHAEOLOGIST ARCHAEOLOGICAL SURVEY OF INDIA AGRA CIRCLE, THE 22 MALL ROAD, AGRA

NAME & ADDRESS OF CONTRACTOR

SI.

DATE OF OPENING: 22/02/2023at 15.30 Hrs. TENDER DOWNLOADED TILL 21/02/2023at 15.00 Hrs. NAME OF WORK: PROVISION FOR ILLUMINATION AT MADAN MOHAN TEMPLE VRINDAVAN DISTT MATHURA

I/We hereby tender for the President of India of the materials described in the under mentioned memorandum according to the specification within the times specified and at the rates specified therein subject to the conditions to the contractor: -

MEMORANDUM

(I) EARNEST MONEY RS. 2,32,852/- (TWO LAKHS THIRTY TWO THOUSAND EIGHT HUNDRED FIFTY TWO ONLY)

(II) SECURITY DEPOSIT Rs. 4,72,704.00 (Rs. FOUR LAKHS SEVENTY TWO THOUSAND SEVEN HUNDRED FOUR)ONLY.

(III) PAYABLE IMMEDIATELY ON THE ACCEPTANCE OF THE TENDER (INCLUDING EARNEST MONEY DEPOSITED WITH THE TENDER) ----(IV) PERCENTAGE TO BE DEDUCTED FROM BILL: Income tax and other taxes as applicable by the government

(V) PLACE OF WORK-MADAN MOHAN TEMPLE, MATHURA. Description of

| NO | Description of execution of work | Quantity | | Rate (in words) | Tota amount (in words) |
|----|--|----------|------|-----------------------|---------------------------------|
| 2. | SITC of high quality long through mono color wash light, Protection Rating : IP66, complying to BIS standard IS 10322 (Part 5/Sec 1): 2012, and having CE certification against standard EN 61547: 2009, EN 60598-1:2015, and EN 61347-2-13:2014 Mounting Structure : Additional wall mount yoke arrangements for fixing the lights. Rotation view : Inbuilt body rotating angle in degrees for uniform rotation angle to get the desired effect. Power consumption : 120-150W, CCT : 2700-3000K, (as per the design approval) Beam Angle Narrow/medium/wide (as per site requirement), Control : ON/OFF, Body : Die casted / extruded aluminum, Hot spot and light distribution : Optics Designed to minimize hot spots. Power Input : DC12/24V with external driver, Surge Protection : Inbuilt surge protection 2KV-4KV(Additional if required will be added as per the requirement) Glare : Specially designed glare free round shape 360 deg / 3 unit. Focusing area/LED will be kept 90 Deg perpendicular below the glare free optic. Size of the LED optic & glare unit must be equal or +/-2% higher to achieve the maximum intensity and less glare. This additional arrangement can be fixed or removed on the application. Glare free optical design for human viewing angle from a distance within 2-3 Mtr. Toughened transparent glass sealed above the glare free unit. Painting : 7 tank processed chemical treatment before the powder coat black/ash/approved color coat. Fixture will be suitable to operate in a temperature range of 0°C to 50°C , lifetime should be at least 50,000 burning hours at L70 at 25 degree centigrade with total protection class of IP 66 & IK07 . Luminaire is inclusive of Integral male/female waterproof connectors , driver, accessories for fixing (nut , bolt , clamps etc) with structures in pre wired conditions as per IS. Light testing standard should be LM79, LED Driver, IP66 or higher, IK05 or higher etc. (Rate Including GST). | 12.00 | EACH | | words) |
| | standard IS 10322 (Part 5/Sec 1): 2012, and having CE certification against standard EN 61547: 2009, EN 60598-1:2015, and EN 61347-2-13:2014 Mounting Structure : Additional wall mount yoke arrangements for fixing the lights. Rotation view : Inbuilt body rotating angle in degrees for uniform rotation angle to get the desired effect. Power consumption : 100-110W, CCT : 2700K-3000K, (as per the design approval) Beam Angle Narrow/medium/wide (as per site requirement), Control : Manual/ON/OFF, Channel : 1 CH, Body : Die casted / extruded aluminum, Hot spot and light distribution : Optics Designed to minimize hot spots & fringing in color mixing applications. Power Input : AC 110-230V, 50Hz or DC12/24V with external driver, Surge Protection : Inbuilt surge protection 2KV-4KV(Additional if required will be added as per the requirement) Glare : Specially designed glare free round shape 360 deg / 3 unit. Focusing area/LED will be kept 90 Deg perpendicular below the glare free optic. Size of the LED optic & glare unit must be equal or +/-2% higher to achieve the maximum intensity and less glare. This additional arrangement can be fixed or removed on the application. Glare free optical design for human viewing angle from a distance within 2-3 Mtr. Toughened transparent glass sealed above the glare free unit. Painting : 7 tank processed chemical treatment before the powder coat black/ash/approved color coat. Fixture will be suitable to operate in a temperature range of 0°C to 50°C , lifetime should be at least 50,000 burning hours at L70 at 25 degree centigrade with total protection class of IP 65 & IK07. Luminaire is inclusive of Integral male/female waterproof connectors , driver, accessories for fixing (nut , bolt , clamps etc) with structures in pre wired conditions as per IS. Light testing standard should be LM79, LED Driver, IP65 or higher, IK05 or higher etc. (Rate Including GST). | 24.00 | EACH | | र्थालय |
| | SITC of high quality long through mono color wash light, Protection Rating : IP65 & IK07, | 45.00 | EACH | Subject | e of the |

भारतीय पुरातत्व सर्वेक्षण Archaeological Survey of India Aura Circle, Aura

| | complying to BIS standard IS 10322 (Part 5/Sec 1): 2012, and having CE certification against | : | | |
|---|---|---------------------------|------|------|
| | standard EN 61547: 2009, EN 60598-1:2015, and EN 61347-2-13:2014 Mounting Structure : Additional wall mount yoke arrangements for fixing the lights. Rotation view : Inbuilt body rotating angle in degrees for uniform rotation angle to get the desired effect. Power consumption : 50-60W, | | | |
| | Manual/ON/OFF, Channel : 1 CH, Body : Die casted / extruded aluminum Hot spot and light | | | |
| | distribution : Optics Designed to minimize hot spots & fringing in color mixing applications. Power Input : AC 110-230V, 50Hz or DC12/24V with external driver, Surge Protection : Inbuilt surge | State State State | | |
| | protection 2KV-4KV(Additional if required will be added as per the requirement) Clara : Chasicilia | | | |
| | perpendicular below the glare free optic. Size of the LED optic & glare unit must be equal or 1/200 | | | |
| | inglier to achieve the maximum intensity and less glare. This additional arrangement can be fixed | | | |
| | or removed on the application. Glare free optical design for human viewing angle from a distance within 2-3 Mtr. Toughened transparent glass sealed above the glare free unit. Painting : 7 tank | | | 1 |
| | be suitable to operate in a temperature range of 0°C to 50°C. Lifetime should be at least 50,000 | Contraction of the second | | |
| | burning hours at L70 at 25 degree centigrade with total protection class of IP 65 & IK07. Luminaire is inclusive of Integral male/female waterproof connectors, driver, accessories for fixing (nut, bolt | | | |
| | LM79, LED Driver, IP65 or higher, IK05 or higher etc. (Rate Including GST) | | | |
| | SITC of high quality long throw mono color linear wash light, Protection Rating : IP65, complying to BIS standard IS 10322 (Part 5/Sec 1): 2012, and having CE certification against standard EN | | | |
| | 61547: 2009, EN 60598-1:2015, and EN 61347-2-13:2014 Mounting Structure : Additional wall mount yoke arrangements for fixing the lights. Rotation view : Inbuilt body rotating angle in degrees | | | |
| | for uniform rotation angle to get the desired effect. Power consumption 40-60W/ CCT 2700 | | | |
| | 3000K, (as per the design approval) Beam Angle Narrow/medium/wide (as per site requirement), Control : Manual/ON/OFF, Channel : 1 CH, Body : Die casted / extruded aluminum, Hot spot and | | | |
| | light distribution : Optics Designed to minimize hot spots & fringing in color mixing applications. Power Input : AC 110-230V, 50Hz or DC12/24V with external driver, Surge Protection : Inbuilt | | | |
| | surge protection 2KV-4KV(Additional if required will be added as per the requirement) Glare | | | |
| | Specially designed glare free round shape 360 deg / 3 unit. Focusing area/LED will be kept 90 Deg perpendicular below the glare free optic. Size of the LED optic & glare unit must be equal or +/-2% | 28.00 | EACH | |
| | higher to achieve the maximum intensity and less glare. This additional arrangement can be fixed or removed on the application. Glare free optical design for human viewing angle from a distance | 10.00 | | |
| | within 2-3 Mitr. Toughened transparent glass sealed above the glare free unit Painting 7 tank | | | |
| | processed chemical treatment before the powder coat black/ash/approved color coat. Fixture will be suitable to operate in a temperature range of 0°C to 50°C, lifetime should be at least 50,000 | | | |
| | burning hours at L70 at 25 degree centigrade with total protection class of IP 65 & IK07. Luminaire is inclusive of Integral male/female waterproof connectors , driver, accessories for fixing (nut , bolt | | | |
| | LM79, LED Driver, IP65 or higher, IK05 or higher etc. (Rate Including GST). | | | |
| | SITC of Neon Flex, 15-20W/M, 3000K, IP66 & IK07, DC24V, Neon Flex, Silicon material-Much | | | |
| 1 | more flexible, Efficient heat dissipation, Smooth plane lighting surface, Perfect resealing with silicone glue. Resistant UV, Flame, Salt, Chlorine. Top Bending (Diameter 180mm). with suitable | 130.00 | RMT | |
| | aluminum fixing clips/channels for mounting. (Rate Including GST). SITC of Outdoor featured customized step light with housing of Pre cast Concrete Cement Body or | | | |
| | Terracotta Sandblast / Grey Finish Coating and Luminaire Wattage 5-8W Well designed thermal | | | |
| 1 | management system with aluminum heat sink Operating Voltage of AC 165-270V 50HZ with universal electronic driver, Light colour should be iny range of 2700-4000K, Mean rated service life | 40.00 | EACH | |
| | L70(tq 25 °C) = 50,000 h.Ingress protection rating (DIN EN 60529): IP65,The luminaire should be provided with Electrical safety class I. Operating Temperature 0 deg to +50 deg , minimum height | 40.00 | LACI | |
| | shuid be approximate 300 mm. (Rate Including GST). | | | |
| (| SITC of DC power driver for the above Lights, Power : 200W, Input : AC 110-240V AC, 50Hz, Dutput : DC 12/24V, Protection rating, IP65, Surge protection : LL 4KV, LE 6KV). (Rate Including GST). | 57.00 | EACH | |
| | Supply of PVC insulated multi core electrical armored flexible 4C x 16Sq mm power cable having ess electrical losses. This PVC insulated and round sheathed wire features a bright multi strands | | | |
| 6 | aluminum conductors and it supports voltage grade up to 1100V. (As per actual depending upon | 1200.00 | RMT | |
| L | he site condition). (Rate Including GST). aying and installation of PVC insulated multi core electrical armored flexible 4C x 16Sq mm power | | | |
| | ncluding GST). (Rate | 1200.00 | RMT | |
| 3 | Supply of PVC insulated multi core electrical un armored flexible 4C x 2.5Sq mm power cable having less electrical losses. This PVC insulated and round sheathed wire features a bright multi | | | |
| 5 | pon the site condition) | 1200.00 | RMT | |
| | aying and installation of PVC insulated multi core electrical un armored flexible 4C x 2.5Sq mm | | | |
| L | nower cable having less electrical losses. (As per actual depending upon the site condition). (Rate | 1200.00 | RMT | mini |

| | Including GST). | 1 | | |
|-----|--|---------|--------|--|
| 12. | SITC of MS poles for fixing the high power LED façade wash/spot lights with the height 9- 12 Meter as per design/Site condition along with necessary clamping arrangements. (Note - dia 76mmx 3.2mm A class, base plate is welded to pole dia 140mm x 4.5mm B class with 4 nos. mounting holes. Integral connector block for loop out is flushed in bottom section of the pole. The contractor shall submit the design of the pole and colour provided by the manufacturer to Engineer in charge for approval and design may very as per the site condition.) (Rate Including GST). | 6.00 | EACH | |
| 14. | Supply and installation of stone fitment with special adhesive for luminare installation. (Use 40 mm thick red sand stone 4.50 sqft in 1 no.). (Rate Including GST). | 30.00 | EACH | |
| 15. | SITC of IP65 "T" power connectors easy and extremely precise locking system. High impact materials - long- lasting and reliable. (Rate Including GST). | 40.00 | EACH | |
| 6. | SITC of IP65 "I" power connectors easy and extremely precise locking system. High impact materials - long- lasting and reliable. (Rate Including GST). | 38.00 | EACH | |
| | SITC of earthlings with galvanized iron earth plate, Earthling pipe, GI earthlings wire, complete with all materials, testing and recording the result as per specification no EA-EP(9- 1-1)(2018-2019). (Rate Including GST). | 2.00 | EACH | |
| 17. | SITC of customized waterproof power junction box/power cable terminal box, IP65 made up of rugged, non- corrosive, high impact polycarbonate, molded nylon encases connectors that use screw compression to secure the wires, protection against water jets and dust from all directions, with bus bar and MCB 10A. (Rate Including GST). | 3.00 | EACH | |
| 8. | SITC of Power Distribution Electrical panel having a Incomer of 32A. Floor mount / rack mount / wall mount. Miniature circuit breakers of single poles shall be fixed of different ratings from 6/10/16/25A as per the lighting fixtures. Wiring inside the module for power, control protection and instrument etc. shall be done with use of 1100 V confirming to IS 694 and IS 8130 All welding slag grounded off and welding pits wiped smooth with plumber metal. Power panels shall be designed in such a way that the internal space is sufficient for hot air movement, and the electrical component does not attain temperature more than 40 degree Celsius. Fabricated panel shall be supported with ms angles of size 25mm x 25mm with an 1.8mm thickness sheet to hold the structure. Individual MCB control for 12 outgoing circuits. (Rate Including GST). | 1.00 | EACH | |
| | SITC of Power Distribution Electrical panel having a Individual MCB control for 12 outgoing circuits Made up of MS Sheet metal fabricated housing Black powder coated Ivory connectors for the internal terminations and external outgoing connecting points, Fiber / brass glands of suitable size fitted MCB control for outgoing circuits. Custom built as per specification and project requirement. (Rate Including GST). | 1.00 | EACH | |
| | Supplying and laying 50 mm outside dia. double wall corrugated pipes (DWC) of HDPE for enclosing cable below ground/road surface, to required depth complete for both power and Dmx. (As per actuals depending upon the site condition). (Rate Including GST). | 1200.00 | RMT | |
| • | Supply, laying clamping and installation. 25mm PVC / FRPP Conduits.(As per actual depending upon the site condition). (Rate Including GST). | 1200.00 | RMT | |
| | Supplying and erecting iron, sheet metal work consisting of CRCA sheets, various sections of iron, plates, chequered plates, rods, bars, MS pipes, bending, cutting, drilling and welding complete erected at the position with necessary materials duly painted with one coat of red oxide and two coats of enamel paint to match the switchgears or as per directions by the authority.(6-1- 19)(2018-19). (Rate Including GST). | 200.00 | кд | |
| | Providing and laying in position cement concrete of grade 1:3:6 (1 Cement : 3 coarse sand (zone- III) derived from natural sources : 6 graded stone aggregate 20 mm nominal size derived from natural sources) excluding the cost of centering and shuttering - All work up to plinth level [M3]. (Rate Including GST). | 51.36 | Cum | |
| | SITC of metallic Protective cage (Jali) for Protection for lights. (Use 1 cage approximate 10.40 sqft.). (Rate Including GST). | 50.00 | bundle | |
| | Excavation work by manual means in foundation trenches (not exceeding 1.5m in width or 10 sqm on plan), including dressing of sides and ramming of bottoms, lift up to 1.5 m, including getting out the excavated soil and disposal of surplus excavated soils as directed, within a lead of 50 m. (Rate Including GST). | 111.66 | Cum | |
| | SITC of MS Fabricated IP 65 driver Box having IP67 glands for incoming and outgoing power connections as per the project requirement. Wall mounting arrangements with the clamps. Easy of driver mounting, termination having fixing arrangements and door with rubber gasket & locking system (Lot). (Rate Including GST). | 20.00 | bundle | |
| | Comprehensive Operation and Maintenance works charges from Item No. 1 to 26) for 5 years (Operation & Maintenance and defect liability Charges for 1st year from the date of testing and commissioning of the project@0%, Operation & Maintenance and defect liability Charges for 2nd year from the date of expiring the first year warranty period, after testing and commissioning of the project@1%, Operation & Maintenance and defect liability Charges for 3rd & 4rth year from the date expiring the second & thiird year warranty period@1.5%, Operation & Maintenance and defect iability Charges for 5th year from the date expiring the fourth year warranty period@2%).(Rate including GST). | 1.00 | EACH | |

Archaeological Survey of India आगेरा मण्डल, आगरा finara Girole, Agra

SIGNATURE OF CONTRACTOR PROVISION FOR ILLUMINATION AT MADAN MOHAN TEMPLE VRINDAVAN DISTT MATHURAS FOR JUNE AND A Chaeologist [13]

(TECHNICAL ELIGIBILITY CRITERIA) ELIGIBILITY CERTIFICATES TO BE ENCLOSED BY THE COMPANY/ FIRM/ AGENCY/ CONTRACTOR

The tendering for execution of work Company/Firm/Agency/Contractor should submit the following documents (self-attested copy).

| SI. NO. | REQUIREMENT | RELEVENT DOCUMENT TO BE PROVIDED | Enclosed Yes/No | PAGE NO. Of Bid Document |
|------------|--|--|--------------------|--------------------------------|
| 1. | The firm/Agency should have registration in ASI /State PWD or any central Government department for civil work. | Copy of Registration certificate to be provided | Yes/No | |
| 2. | The Firm/ Agency/ Contractor should be registered with GST. | Copy of Registration | Yes/No | |
| 3. | The Firm/Agency should have Income Tax Return for three financial year 2018-2019, 2019-2020 and 2020-2021 (A.Y. 2019-2020, 2020-2021& 2021-2022). | ConvofITP for financial user | Yes/No | |
| 4. | Pan Card | Copy of Pan Card should be provided | Yes/No | |
| 5. | The firm/agency should have average annual financial turnover for three financial year (2018-2019, 2019-2020 and 2020-2021), should be at least 30% of the tender cost i.e. Rs. 27,94,225/ A certificate in this regard issued by the CA has to be submitted. | Copy to be provided. | Yes/No | |
| 6. | The firm / agency should have experience for completion at least three similar nature of work i.e. Archaeological Illumination/Façade Lightning Or as per BOQ of the said NIT at Monuments/heritage sites/Govt. Buildings of Central/State Government each costing not less than 40% of the tender cost i.e. 37,25,633/- OR Two Similar Nature of works each Costing not less than 50% of the tender cost i.e. Rs. 46,57,041/- OR One Similar Nature of work costing not less than 80% of the tender cost i.e. Rs. 74,51,266/ And that/those work/works should have been completed during the last seven financial years. i.e. 2015-2016 to 2021-2022. | Copy of work order and its completion certificate to be provided | Yes/No | |
| 7. | EMD (in FDR form) or Exemption Certificate or Bid Security Declaration Certificate, | Copy to be provided. | Yes/No | |
| 8. | Tender acceptance Letter on letter head and Declaration Certificate of black listing. | Copy to be provided. | Yes/No | |
| | Technical Data Sheet along with necessary test report for Item No 1-5. | The bidder should provide the technical data sheet for item No. 1 in attached format as per Annexure-I | Yes/No | |
| 10. | OEM Authorization Letter | The bidder should provide the OEM certificate/OEM authorization letter in favour of the bidder. | Yes/No | |
| 11. | All the type test reports should be from NABL Accredited Lab. | | Yes/No | |
| 12. | Manufacturer must have factory in India. | | Yes/No | |
| 13. | Drawing and concept plan duly signed | The bidder should signed the concept plan/design given in the NIT Annexure-II | Yes/No | |

1. Those Bidders who have not mentioned page number against the above point 1-8in the column of **PAGE NO. Of Bid Document**will not be evaluated and rejected in Technical Stage.

2. The bidders are requested to enclose only required documents.

3. For experience against Para 6 both work order and its completion certificate is mandatory. The copy of work order without completion certificate and Completion Certificate without Copy of Work Order will not be considered.

AUTHORISED SIGNATORY

कार्यालय

LEGAL:-

- 1- Vendor Will be responsible for timely payment to the supplied manpower and statutory authorities and compliance of all statutory provisions relating to minimum wages/specified contract amount etc. In respect of the person deployed by it in the ASI. The agency has to submit the copy of deposit of EPF/ESI with concerned authority every month as an evidence of payment in accounts of person deployed.
- 2- The tendering agency shall also be liable for depositing all taxes, levies, cess etc. On amount of service rendered by it to the Archaeological Survey of India to the concerned tax collection authorities from time to time as per extent rules and regulations on the matter.
- 3- The Provision of the information Technology Act (IT Act) as amended from time to time will be applicable to the vendor and the employees assigned by the vendor to Archaeological Survey of India.

Force Measure:-

1- Force measure clause will mean and be limited to the following in the execution of the contract/purchase order placed by Archaeological Survey of India, "if at any time, during the continuance of contract, the performance in whole or in part by either party of any obligation under this contract shall be prevented or deployed by reason of any war, hostility, act of public enemy, civil commission, sabotage, fires, floods, explosions, epidemics, quarantine restrictions, strikes, lockouts or act of God (here in after referred to 'events') provided notice of the happening of such events is given by either party. This shall be reason enough to entitle both to terminate this contract and either party will not have any claim for damage against the other in respect of such non-performance or delay in performance. Deliveries under the contract shall be resumed as soon as practicable after such event has come to an end or ceased to exist, and the decision of the DirectorGeneral, Archaeological Survey of India as to whether the deliveries have been so resumed or not, shall be final or conclusive, provided further that is the performance is whole or part or any obligation under this contract is prevented or delayed by reason or any such event for a period exceeding 30 days, either party may at its option terminate the contract"

ARBITRATION:-

1- Archaeological Survey of India and the selected vendor shall make every effort to resolve amicably, by direct negotiation, any disagreement or dispute arising between them under or in connection with the work order. If any dispute arises between parties on aspects not covered by this agreement, or the construction or operation thereof, or the right or liabilities under these except as to any matters the decision of which is specially provide for by the general or the special conditions such dispute shall be referred to the arbitrator as appointed by Director General, Archaeological Survey of India and the award of arbitration, as the case may be, shall be final and binding on both the parties.. The arbitrator with the consent of parties may modify the time frame for making and publishing the awards. Such arbitration shall be governed in all respects by the provision of the Indian Arbitration Act 1996 or later and the rules there under and any statutory modification or re-enactment, thereof. The arbitration proceeding shall be held in New Delhi.

APPLICABLE LAW:-

1- The Work will be governed by the laws and procedures established by the Government of India, within the frame work of applicable legislation and enactment made from time to time concerning such commercial dealings/processing.

्रमासंस्था Store तम्हाल अपिसम्ब पुरासकार्टीन् Superiodunding Actianciasia भारतीय पुरासराज सर्वेदाप Archaeological Survey of India अगगरा मण्डल, आगरा Agra Circla, Agra

INSTRUCTIONS FOR ONLINE BID SUBMISSION

The Bidders are required to submit soft copies of their Bids electronically on the CPP Portal, using valid Digital Signature Certificates. The instructions given below are meant to assist the Bidders in registering on the CPP Portal, prepare their bids in accordance with the requirements and submitting their Bids online on the CPP Portal. More information useful for submitting online Bids on the CPP Portal may be obtained at: https://eprocure.gov.in/eprocure/app. REGISTRATION

- Bidders are required to enrol on the e-Procurement module of the Central Public Procurement Portal (URL 1) https://eprocure.gov.in/eprocure/app) by clicking on the link "Online Bidder Enrolment" on the CPP Portal which is free of charge
- As part of the enrolment process, the Bidders will be required to choose a unique username and assign a password for their 2) 3)
- Bidders are advised to register their valid email address and mobile numbers as part of the registration process. These would be used for any communication from the CPP Portal. 4)
- Upon enrolment, the Bidders will be required to register their valid Digital Signature Certificate (Class II or Class III Certificate with signing key usage) issued by any Certifying Authority recognized by CCA India (e.g. Sify / NCode / EMudhra etc.), with thei profile. 5)
- Only one valid DSC should be registered by a Bidder. Please note that the Bidders are responsible to ensure that they do not lend their DSC's to others which may lead to misuse. 6)
- Bidder then logs in to the site through the secured log-in by entering their user ID / password and the password of the DSC / e

SEARCHING FOR TENDER DOCUMENTS

- There are various search options built in the CPP Portal, to facilitate Bidders to search active tenders by several parameters 1) These parameters could include Tender ID, Organization Name, Location, Date, Value, etc. There is also an option of advanced search for tenders, wherein the Bidders may combine a number of search parameters such as Organization Name, Form o Contract, Location, Date, Other keywords etc. to search for a tender published on the CPP Portal. 2)
- Once the Bidders have selected the tenders they are interested in, they may download the required documents / tende schedules. These tenders can be moved to the respective 'My Tenders' folder. This would enable the CPP Portal to intimate the Bidders through SMS / e-mail in case there is any corrigendum issued to the tender document.
- The Bidder should make a note of the unique Tender ID assigned to each tender, in case they want to obtain any clarification 3) help from the Helpdesk.
- PREPARATION OF BIDS
- Bidder should take into account any corrigendum published on the tender document before submitting their Bids. 1) 2)
- Please go through the tender advertisement and the tender document carefully to understand the documents required to be submitted as part of the Bid. Please note the number of covers in which the bid documents have to be submitted, the number o documents - including the names and content of each of the document that need to be submitted. Any deviations from these may lead to rejection of the Bid.
- Bidder, in advance, should get ready the Bid documents to be submitted as indicated in the tender document / schedule and 3) generally, they can be in PDF / XLS / RAR / DWF/JPG formats. Bid documents may be scanned with 100 dpi with black and white option which helps in reducing size of the scanned document.
- To avoid the time and effort required in uploading the same set of standard documents which are required to be submitted as a 4) part of every Bid, a provision of uploading such standard documents (e.g. PAN card copy, annual reports, auditor certificates etc.) has been provided to the Bidders. Bidders can use "My Space" or "Other Important Documents" area available to them to upload such documents. These documents may be directly submitted from the "My Space" area while submitting a Bid, and need not be uploaded again and again. This will lead to a reduction in the time required for Bid submission process.

SUBMISSION OF BIDS

- Bidder should log into the site well in advance for bid submission so that they can upload the Bid in time i.e. on or before the Bid 1) submission time. Bidder will be responsible for any delay due to other issues. 2)
- The Bidder has to digitally sign and upload the required bid documents one by one as indicated in the tender document. 3)
- Bidder has to select the payment option as "offline" to pay the tender fee / EMD as applicable and enter details of the instrument. Bidder should prepare the EMD as per the instructions specified in the tender document. The original should be 4) posted/couriered/given in person to the concerned official, latest by the last date of Bid submission or as specified in the tender documents. The details of the DD/any other accepted instrument, physically sent, should tally with the details available in the scanned copy and the data entered during Bid submission time. Otherwise the uploaded bid will be
- rejected. Bidders are requested to note that they should necessarily submit their financial Bids in the format provided and no other forma 5) is acceptable. If the price Bid has been given as a standard BOQ format with the tender document, then the same is to be downloaded and to be filled by all the Bidders. Bidders are required to download the BOQ file, open it and complete the white coloured (unprotected) cells with their respective financial quotes and other details (such as name of the Bidder). No other cells should be changed. Once the details have been completed, the Bidder should save it and submit it online, without changing the filename. If the BOQ file is found to be modified by the Bidder, the Bid will be rejected.
- The server time (which is displayed on the Bidders' dashboard) will be considered as the standard time for referencing the 6) deadlines for submission of the Bids by the Bidders, opening of Bids etc. The Bidders should follow this time during Bid submission.
- 7) All the documents being submitted by the Bidders would be encrypted using PKI encryption techniques to ensure the secrecy o the data. The data entered cannot be viewed by unauthorized persons until the time of Bid opening. The confidentiality of the Bids is maintained using the secured Socket Layer 128 bit encryption technology. Data storage encryption of sensitive fields is done. Any Bid document that is uploaded to the server is subjected to symmetric encryption using a system generated symmetric key. Further this key is subjected to asymmetric encryption using buyers/Bid opener's public keys. Overall, the uploaded tender documents become readable only after the tender opening by the authorized Bid openers.
- 8) The uploaded tender documents become readable only after the tender opening by the authorized Bid openers. 9)
- Upon the successful and timely submission of Bids (I e after Clicking "Freeze Bid Submission" in the portal), the portal will give a successful Bid submission message & a Bid summary will be displayed with the Bid no. and the date & time of submission of the Bid with all other relevant details.
- The Bid summary has to be printed and kept as an acknowledgement of the submission of the Bid. This acknowledgement may 10) be used as an entry pass for any Bid opening meetings.

ASSISTANCE TO BIDDERS

- Any queries relating to the tender document and the terms and conditions contained therein should be addressed to the Tende 1) Inviting Authority for a tender or the relevant contact person indicated in the tender.
- Any queries relating to the process of online Bid submission or queries relating to CPP Portal in general may be directed to the 2) 24x7 CPP Portal Helpdesk Mobile Number - +91 8826246593 Tel: The 24 x 7 Help Desk Number 0120-4200462 0120-4001002.

Superinti ading Act and and धेर्गालय सुरालत्व जावेशान

TENDER ACCEPTANCE LETTER

(To be given on Company Letter Head)

Date:

To,

SUPERINTENDING ARCHAEOLOGIST, ARCHAEOLOGICAL SURVEY OF INDIA, The 22, Mall Road, Agra Circle, Agra

SUB: ACCEPTANCE OF TERMS & CONDITIONS OF TENDER.

TENDER REFERENCE NO: 03/MTH/64/2022-2023/W (PIN CODE 282001)

NAME OF TENDER / WORK: - PROVISION FOR ILLUMINATION AT MADAN MOHAN TEMPLE VRINDAVAN DISTT MATHURA Dear Sir,

1. I/ We have downloaded / obtained the tender document(s) for the above mentioned 'Tender/Work' from the web site(s) namely: for the work of PROVISION FOR ILLUMINATION AT MADAN MOHAN TEMPLE VRINDAVAN DISTT MATHURA.

2. I/ We hereby certify that I / we have read the entire terms and conditions of the tender documents from Page No. -- to ---(including all documents like annexure(s), schedule(s), etc.), which form part of the contract agreement and I / we shall abide hereby by the terms / conditions / clauses contained therein.

3. The corrigendum(s) issued from time to time by your department/ organization to have also been taken into consideration, while submitting this acceptance letter.

4. I/ We do hereby declare that our Firm has not been blacklisted/ debarred by any Govt. Department/Public sector undertaking.

5. I/ We certify that all information furnished by our Firm is true & correct and in the event that the information is found to be incorrect/untrue or found violated, then your department/ organization shall without giving any notice or reason therefore or summarily reject the bid or terminate the contract, without prejudice to any other rights or remedy including the forfeiture of the full said earnest money deposit absolutely.

6. I/ We agree to complete the work after acceptance of the tender.

Yours Faithfully,

(Signature of the Bidder)

with Official Seal

कार्यालय Office of the अधीक्षण पुरालस्वविष् Superintending Archaeologist भारतीय पुरालस्व सर्वक्रण Archaeological Survey of India आगरा मण्डल, आगरा Agra Circle, Agra

PROVISION FOR ILLUMINATION AT MADAN MOHAN TEMPLE VRINDAVAN DISTT MATHURA

DECLARATION

- 1. I,----- Son/Daughter of Shri ------ signatory of the agency/ Firm mentioned above, is competent to sign this declaration and execute this tender document
- 2. I have carefully read and understood all the terms and conditions of the tender and undertake to abide by them:
- 3. My agency has not been blacklisted/ debarred from participating in tender by any Ministry, Department of Government of India and Government of India undertaking in the last Three (3) Years as on date of opening of this Tender.
- 4. The information/ documents furnished along with the above application are true and authentic to the best of my knowledge and belief.
- 5. I/ We am/ are well aware of the fact that furnishing of any false information/ fabricated document would lead to rejection of my tender at any stage besides liabilities towards prosecution under appropriate law:

Signature of authorized person Full Name: Seal:

Date: Place:

> PROVISION FOR ILLUMINATION AT MADAN MOHAN TEMPLE VRINDAVAN DISTT MATHURATE मण्डल, आगरेग [18]

TECHNICAL DOCUMENTS

It's mandatory for bidder to upload all the followingdocuments in File noin Technical package


- 1. Copy of Technical data Sheet,
- 2. LM 79.
- 3. LM 80.
- 4. To support all the proposed technical specifications in the BOQ:- All Type test reports from NABL accredited lab,
- 5. Anti-UV & thermal resistance test reports from NABL accredited lab
- 6. BIS Certificate,
- 7. RoHS compliance,
- 8. Polar curve diagram & Illuminance diagram,
- 9. OEM Certificate authorization letter

Bidder to execute the work with luminaire fittings as per the proposed specifications. The successful bidder should get the Luminaire fittings and Materials verified before execution of the work. If the Luminaire fittings/ workman ship/ materials supplied is found substandard, the same will be rejected.

Aere Circle, Agre



Concept plan & Drawings as per estimate

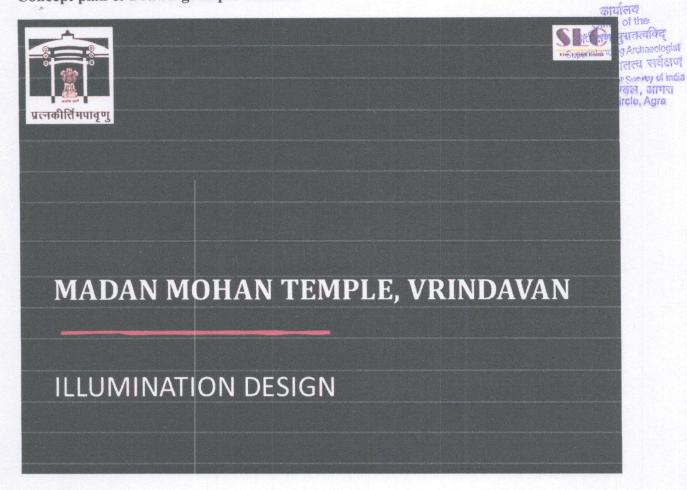

कार्यातय Office of the आधिवाम पुपासत्वयिद् Superintending Archaeologist भारतीय पुपासत्व सर्वेलाग Archaeological Survey of India आगरा मन्यत्व, आगरा Agra Circle, Agra


INTRODUCTION

Madan Mohan Temple, Vrindavan


The temple is dedicated to the Krishna. It is believed that one Circle, Ag night, King Gopal Singh was instructed by Krishna in his dream to bring his Madan Mohan idol from Vrindavan to Rajasthan before the attack of Mughal emperor Aurangzeb on Vrindavan temples. As instructed, the king dfaraulibrought the original idol of Madan Mohan with him overnight and got this temple constructedKarauli


Superintending Advantages

- It is also said that to protect idols of Krishna from Mughals, two idols were brought from Vrindavan and placed one at Karauliand another at Jaipur. It is said that to complete the Govardhan Yatra, it is mandatory to visit Madan Mohan temple and Govind Dev Ji Temple.
- It is one of the Char Dham okarauliDistrict. Other three are Kaila Devi Temple, Mehandipur Balaji Temple and Shri Mahavirji.
- Devotees used to put the Prasad. Jugal Prasad is a kind Miog in which devotees offer Laddu an Cachauri It is put once in a day by one person only. The queue for the same is around two year long.

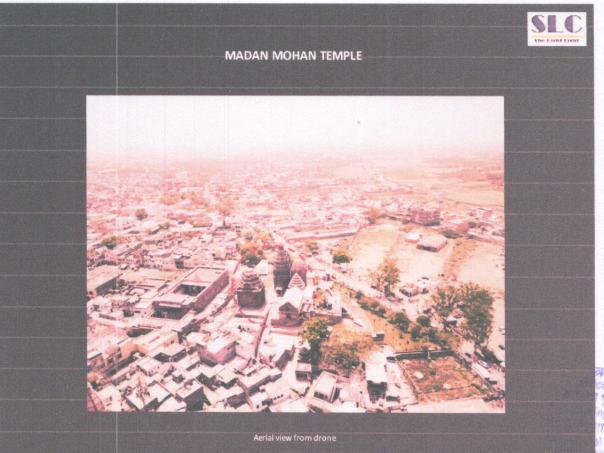



कार्डीत्वव So of the garaculat ng Archaeologisi गालरण सर्चेकार्ण si Survey of Inda Survey of Inda Nord, Survey of Inda

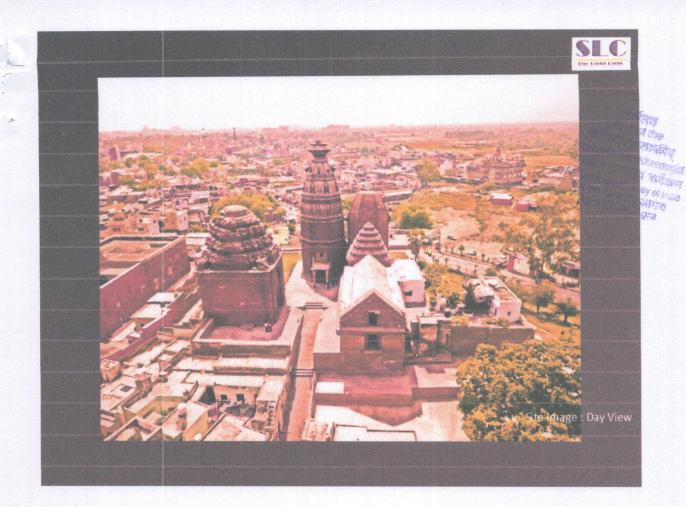

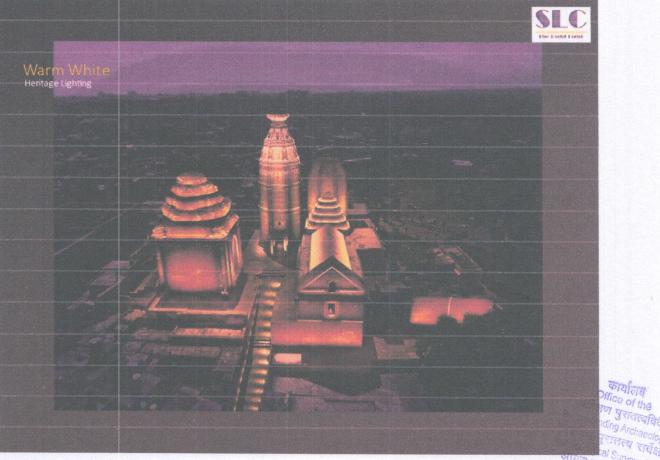

াding Archaeologia বিংক্তে থাইকো cal Survey of India Agra Circle, Agra

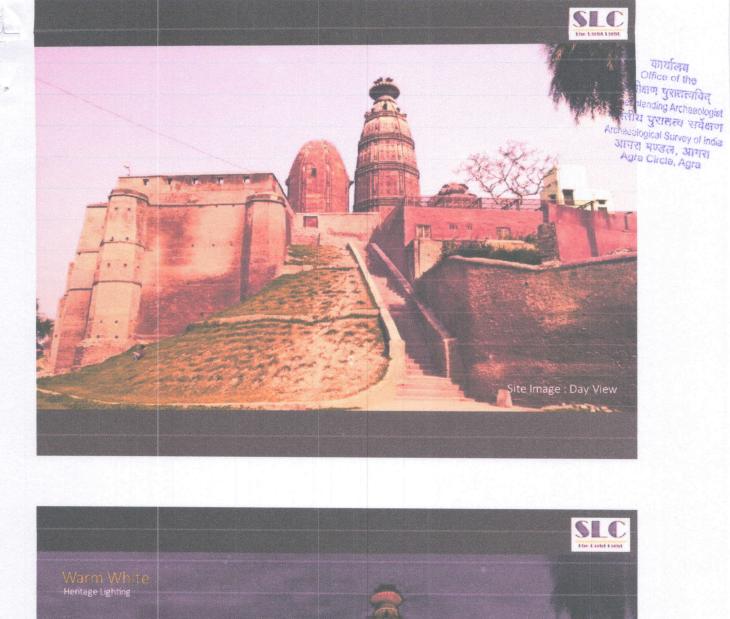


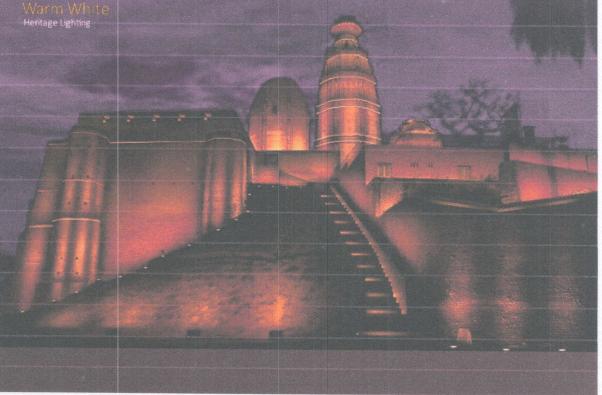

कार्यात्मव Office of the अधीषण पुरासाखविद् Supermonding Archaeologist भारतीय पुरासित्म सर्वेकण Archaeological Guivey of India


PROVISION FOR ILLUMINATION AT MADAN MOHAN TEMPLE VRINDAVAN DISTT MATHURA

[23]

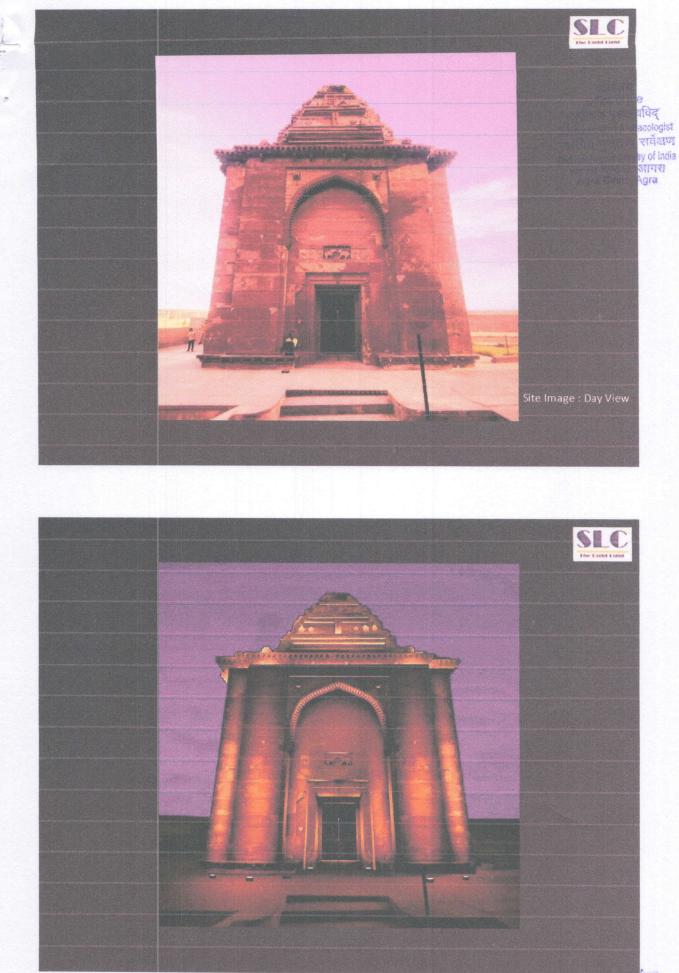


कार्यलिय Office of the बधीवाण पुरातत्वविद् Supaintending Archaeologist' भारतीय पुरातत्त्व 'सर्वेक्षजा' Archaeogaal Surveyol Indian आस. मण्डल, आगरा। -Arca Circle, Agra-


when we west write, painting

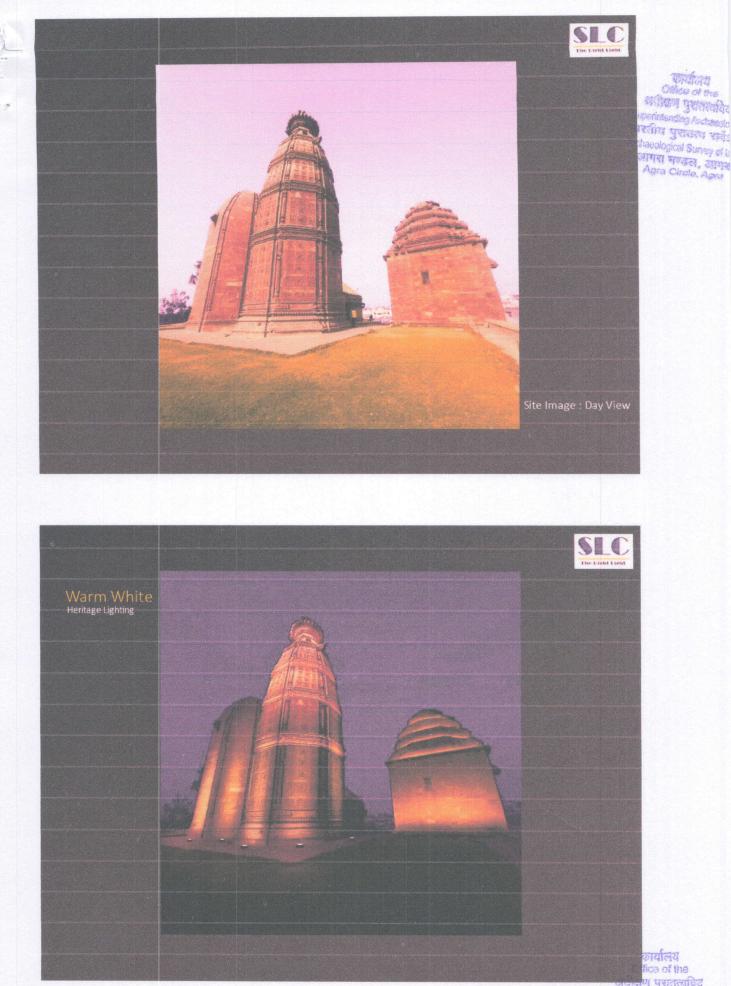



जपायाण पुरातत्वविव् Superintending Archaeologist भारतीय पुरातत्व शर्यकाण Archaeological Survey of India आगरा मण्डल, आगरा Agra Cirola, Agra

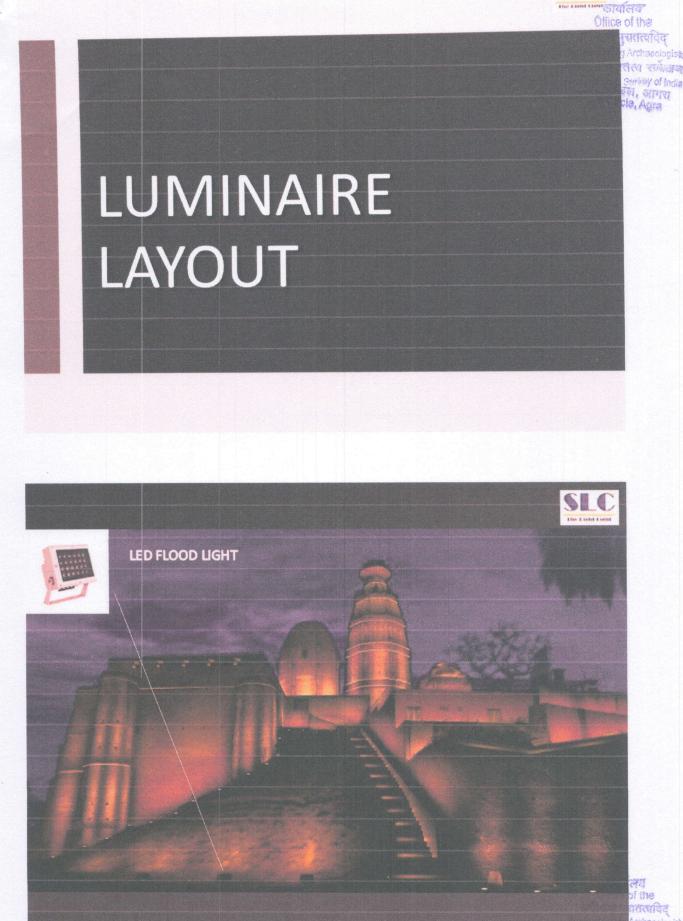


Anifasologis स्थ प्रचेंक्षण Anifasological Survey of India अग्रेगी प्रायदास, आगरा क्रिक्ट Circlo, Agra

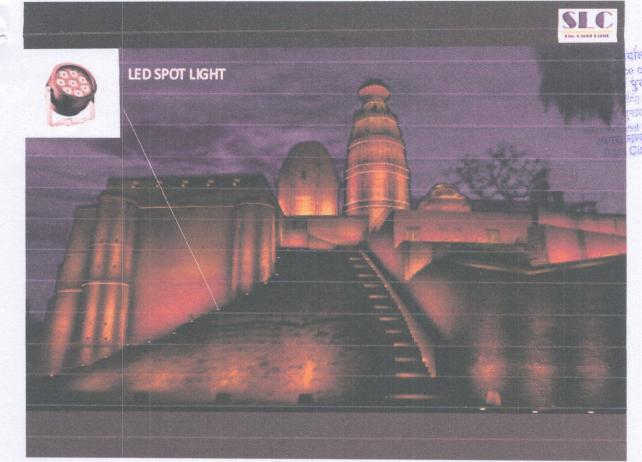



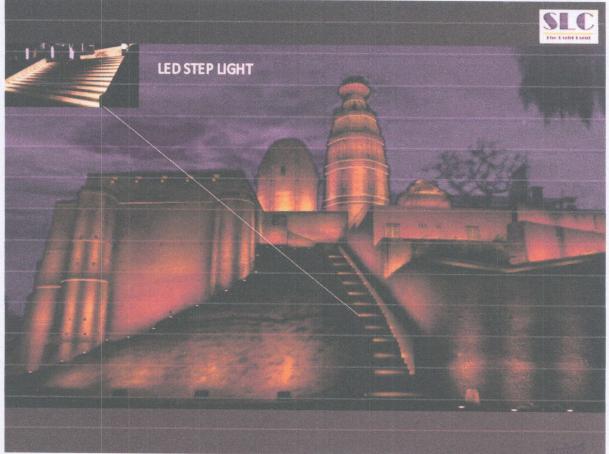


PROVISION FOR ILLUMINATION AT MADAN MOHAN TEMPLE VRINDAVAN DISTT MATHURA [27]

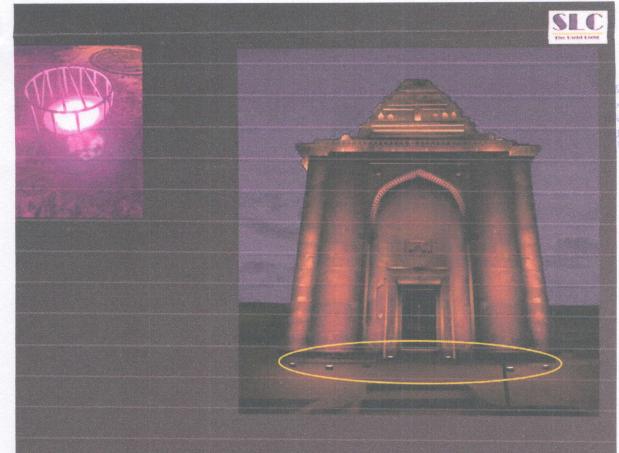

3



Cifice of the त्रीक्षण पुरानत्वाविष् erintending Archaeolo Agra Circle, Agra

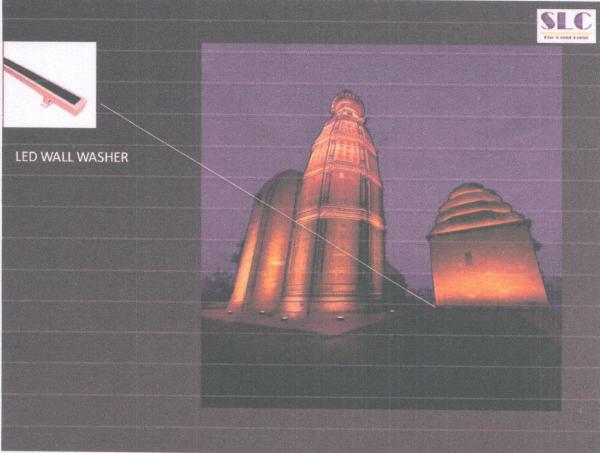

ce of the Superintending Archaeologist भारतीय पुरांतत्व सर्वक्षण Archaeological Survey of India STITU TIME A STITU Agra Circle, Agra


त्रयांलय



NARROW BEAM PROJECTOR LIGHTS TO ILLUMUNATE UPPER PART OF THE DOME FROM LONG DISTANCE




कीवलिय Cifice of the Ialoy पुरातत्वयिद् nanding Archasologist य पुरातत्व सार्वेक्षण कोरेड्टवा Survey of India यस सार्थ्यम् कार्यव्य प्राव Circle Argan

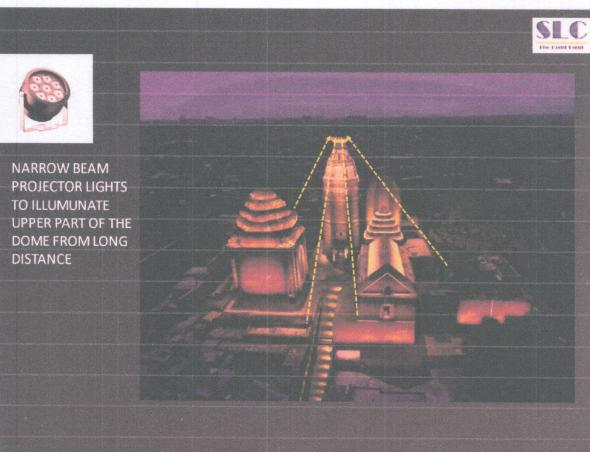


कार्यालय Office of the जगीवण पुरासत्वविद् Superintending Archaeologis भारतीय पुरासत्य जवेहाप Archaeological Survey of Ind आगस बण्डल, आगन Agra Circle, Agra



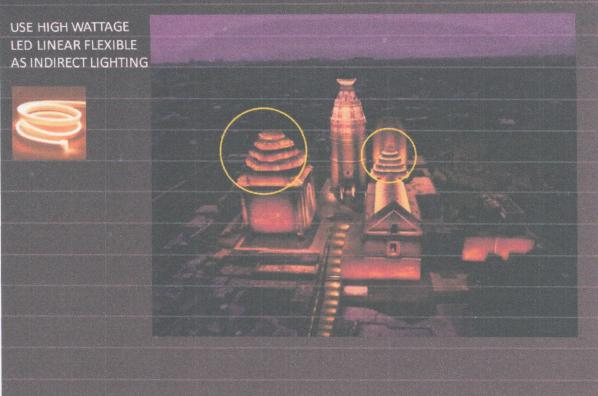


1


कायतित्व Clifice of the विधायम पुरासरवादिक प्राथनित्व Archaeon प्राय पुरासरव पार्वज्ञ ब Judical Survey of Ind पार्य नण्डल, आगस्त प्राव Circle, Agra

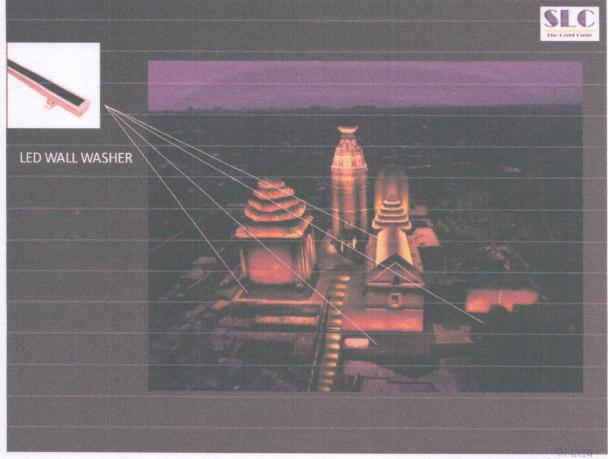

Office of the আগিল পুথলেববিব্ তেওঁলোন বালু Archaeologist সংগতি বুলুলেবে জুইলেবে জুইলেবে জুইলেবে জুইলেবে জুইলেবে জুইলেবে জুইলেবে জুইলেবে Archaeologiesi Survey of India PROVISION FOR ILLUMINATION AT MADAN MOHAN TEMPLE VRINDAVAN DISTT MATHURA বা পাঁচজন, আগবা [30] **Earthing Drawing**

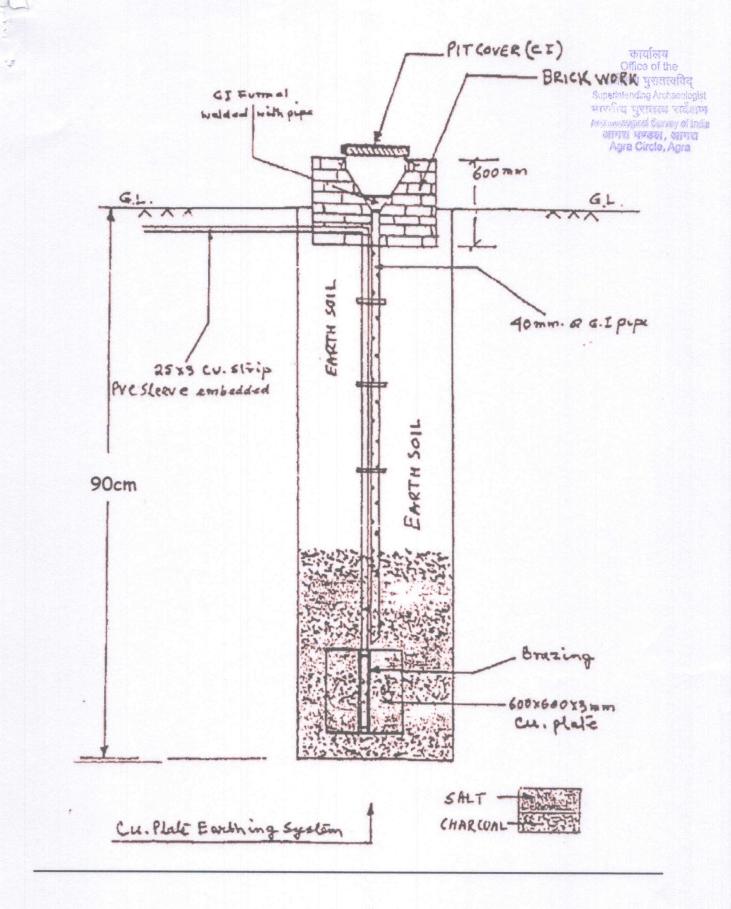

कार्यालय Office of the इत्यीक्षण पुरासस्यविद् Superintensing Archeeologist सन्दर्शन्य पुरासत्य सार्यमण् Archaeological Survey of India धाराय मण्डल, आगस Agra Circle, Agra

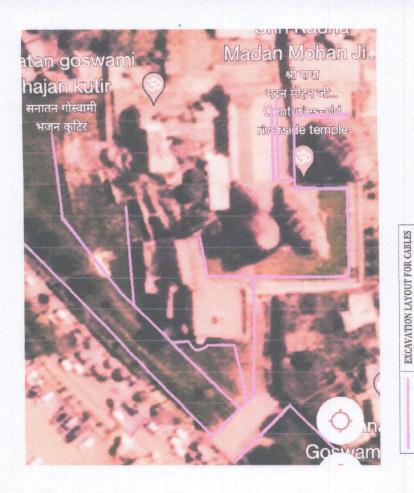

-5

कार्यालय Office of the September पुरातत्विद् Suppliatenting Archaeologica आरतीष्ठ इरावात्य अर्थवरण Archaeologica Cantor of India डाराय सम्बद्ध जीवरण Agra Circle, Agra

कार्यालय Office of the अतीक्षण पुरावत्वविद् अतीक्षण पुरावत्वविद् उपरावत्व सर्वेद्यण अव्याद्य Survey of India अव्याद्य Survey of India अव्याद्य त्याउल, आगरा Agra Circle, Agra

[32]